

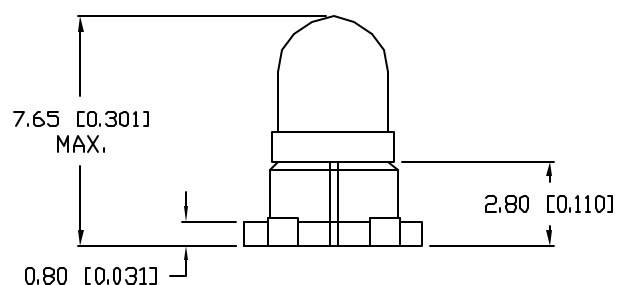


UNCONTROLLED DOCUMENT

PART NUMBER

SML-IFL314065-BT

REV.

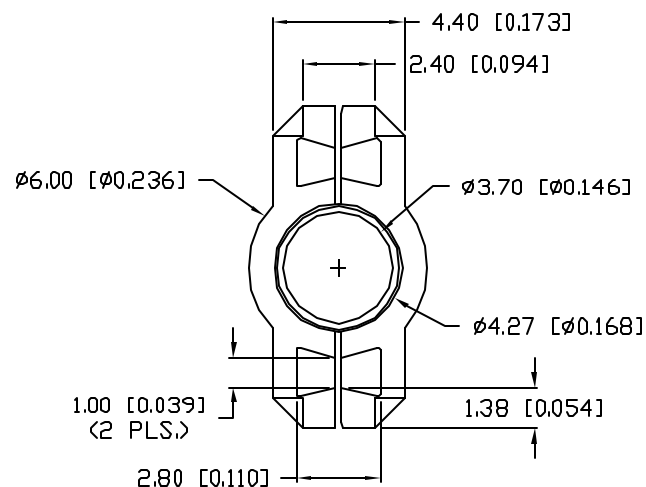

ELECTRICAL SPECIFICATIONS

W/OUT BOOT ATTACHED

OPERATING VOLTAGE VAC. OR VDC.	12.0-14.0V
DESIGN VOLTAGE VAC. OR VDC.	14.0V
CURRENT DRAW @ DESIGN VOLTS	65mA
M.S.C.P. @ DESIGN VOLTS	25 ± 25%
AVERAGE LIFE @ DESIGN VOLTS (AC)	10,000 HOURS

MECHANICAL SPECIFICATIONS

BULB SIZE & SHAPE	T3mm TUBULAR
BULB GLASS TYPE	K 12 SOFT GLASS
FILAMENT SHAPE	C-2F
MANUFACTURING P55	T3nW 3044

ENVIRONMENTAL SPECIFICATIONS

VIBRATION TESTING	MIL-E-5400N, GRAPH IV
SHOCK TEST	MIL-STD-883 METHOD 2002
	TEST CONDITION A
OPERATION TEMP.	-50 TO +100°C
STORAGE TEMP.	-50 TO +125°C
SOLDERABILITY OF LEADS	N/A

NOTES:

1. BASE COLOR: WHITE.
2. $u'=.125$; $v'=.499$.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.020), XXX=±0.25 (±0.010), XXXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=+DECIMAL PRECISION -0.00, MAX.=+0.00 -DECIMAL PRECISION

REV.

PART NUMBER

SML-IFL314065-BT

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

T-3mm INCANDESCENT LAMP, 14V, 65mA, 0.25 MSCP,
WHITE BASE, SURFACE MOUNT, BOOT.

DRAWN BY:

CHECKED BY:

APPROVED BY:

DATE: 6.7.03

PAGE: 1 OF 1

SCALE: N/A

CT