
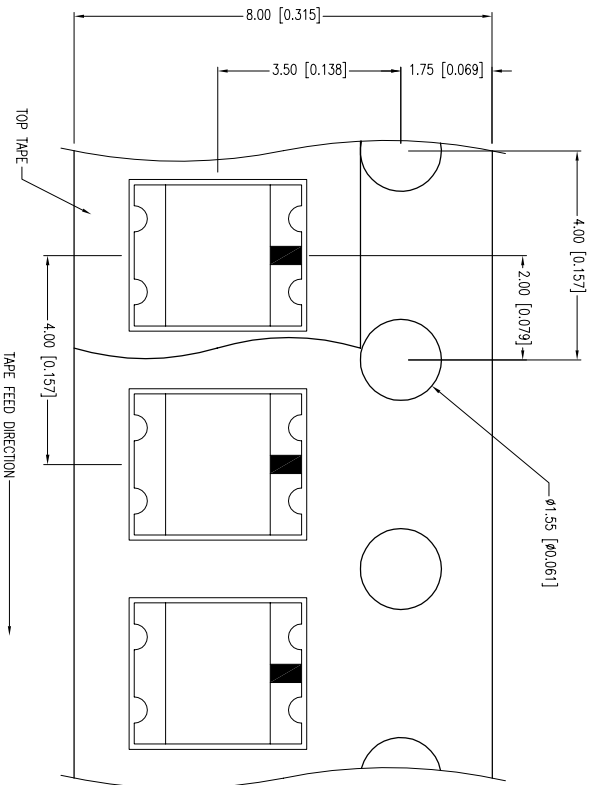


PART NUMBER	SML-LX1210GC-TR	REV.	I
DATE	E.C.N. NUMBER AND REVISION COMMENTS		
11.06.95	ADDED TAPE W/POLARITY AND DIRECTION.	E.C.N. #10324.	A
03.17.97		E.C.N. #10404, & #10BRDR & REDRAWN.	B
05.22.98		E.C.N. #10695	C
01.04.01		E.C.N. #10834.	D
01.25.02		E.C.N. #10972.	E
03.25.03		E.C.N. #11148.	F
02.07.05		E.C.N. #11508.	G
03.10.09		E.C.N. #11740/#10BRDR. & REDRAWN.	H
07.22.11			I

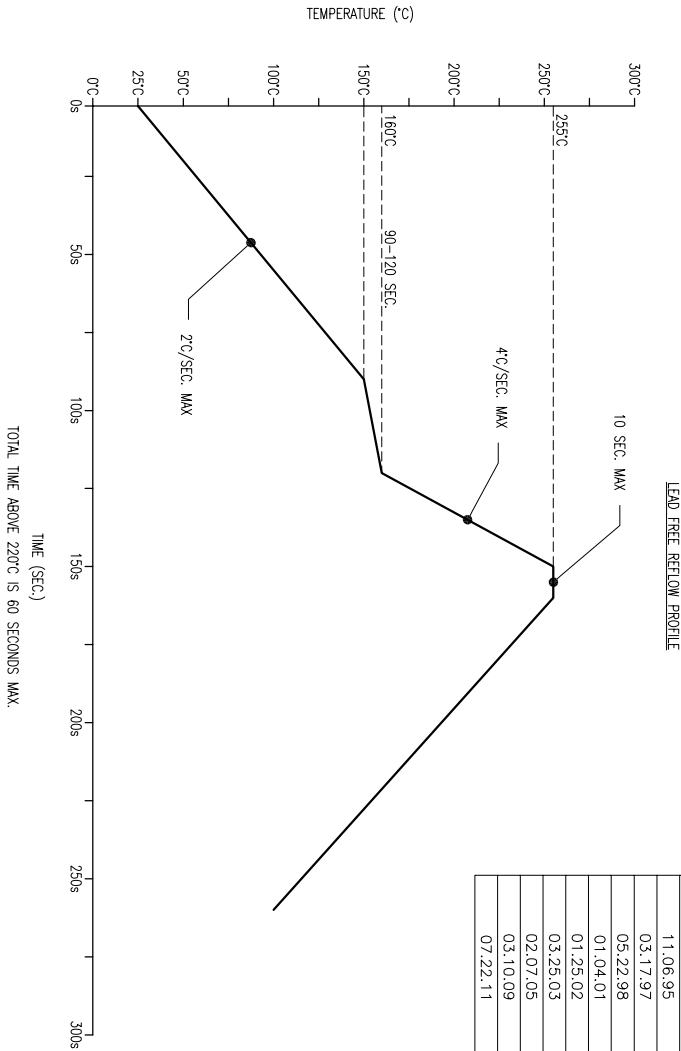

- NOTES:
1. THE CATHODE IS ORIENTED TOWARDS THE TAPE SPOCKET HOLE.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005), LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= -0.00, DECIMAL PRECISION MAX.= +0.00, DECIMAL PRECISION

LUMEX
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

2.7x 3.2mm P.C.B. SURFACE MOUNT LED, DUAL RED/GREEN CHIPS, WATER CLEAR LENS, TAPE & REEL.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	07.22.11	DRAWN BY:	AB
PAGE:	2 OF 2	CHKD BY:	KF
SCALE:	NTS	APRVD BY:	KF
UNIT:	mm [INCH]		

UNCONTROLLED DOCUMENT