

**Part Number: SML-LX2731SIC-ATR**



**Features**

- P-LCC-2 package.
- Colorless clear resin.
- Wide viewing angle 120°.
- Inner reflector and white package.
- Brightness: 355 to 710 mcd at 20 mA
- Precondition: Bases on JEDEC J-STD 020D Level 3
- Qualification according to AEC-Q101 rev C.
- Automotive reflow profile (IR reflow or wave soldering)
- Compliance with EU REACH
- Compliance Halogen Free (Br<900 ppm ,Cl <900 ppm, Br+Cl <1500 ppm)

**Applications**

- Automotive backlighting or indicator: Interior and exterior lighting, dashboard, switch, reading lamp, audio and video equipments...etc.
- Backlight: LCD, switches, symbol, mobile phone and illuminated advertising.
- Display for indoor and outdoor application.
- Ideal for coupling into light guides.
- Substitution of traditional light.
- Optical indicator.
- General applications.

## Part Number: SML-LX2731SIC-ATR

### Device Selection Guide

| Chip Materials | Emitted Color | Resin Color |
|----------------|---------------|-------------|
| AlGaInP        | Super Red     | Water Clear |

### Absolute Maximum Ratings (Ta=25°C)

| Parameter                             | Symbol        | Rating                                                                      | Unit |
|---------------------------------------|---------------|-----------------------------------------------------------------------------|------|
| Reverse Voltage                       | $V_R$         | 12                                                                          | V    |
| Forward Current                       | $I_F$         | 50                                                                          | mA   |
| Power Dissipation                     | $P_d$         | 122.5                                                                       | mW   |
| Junction Temperature                  | $T_j$         | 125                                                                         | °C   |
| Operating Temperature                 | $T_{opr}$     | -40 ~ +100                                                                  | °C   |
| Storage Temperature                   | $T_{stg}$     | -40 ~ +110                                                                  | °C   |
| Thermal Resistance                    | $R_{th\ J-A}$ | 250                                                                         | K/W  |
|                                       | $R_{th\ J-S}$ | 150                                                                         | K/W  |
| ESD<br>(Classification acc. AEC Q101) | $ESD_{HBM}$   | 2000                                                                        | V    |
|                                       | $ESD_{MM}$    | 200                                                                         | V    |
| Soldering Temperature                 | $T_{sol}$     | Reflow Soldering : 260 °C for 30 sec.<br>Hand Soldering : 350 °C for 3 sec. |      |

## Part Number: SML-LX2731SIC-ATR

### Electro-Optical Characteristics (Ta=25°C)

| Parameter                    | Symbol            | Min.  | Typ.  | Max.  | Unit | Condition            |
|------------------------------|-------------------|-------|-------|-------|------|----------------------|
| Luminous Intensity           | I <sub>v</sub>    | 355   | ----- | 710   | mcd  | I <sub>F</sub> =20mA |
| Viewing Angle                | 2θ <sub>1/2</sub> | ----- | 120   | ----- | deg  | I <sub>F</sub> =20mA |
| Peak Wavelength              | λ <sub>p</sub>    | ----- | 640   | ----- | nm   | I <sub>F</sub> =20mA |
| Dominant Wavelength          | λ <sub>d</sub>    | 626   | ----- | 635   | nm   | I <sub>F</sub> =20mA |
| Spectrum Radiation Bandwidth | Δλ                | ----- | 20    | ----- | nm   | I <sub>F</sub> =20mA |
| Forward Voltage              | V <sub>F</sub>    | 1.75  | ----- | 2.45  | V    | I <sub>F</sub> =20mA |
| Reverse Current              | I <sub>R</sub>    | ----- | ----- | 10    | μA   | V <sub>R</sub> =12V  |

Note:

1. Tolerance of Luminous Intensity: ±11%
2. Tolerance of Dominant Wavelength: ±1nm
3. Tolerance of Forward Voltage: ±0.1V

### Bin Range of Luminous Intensity

| Bin Code | Min. | Max. | Unit | Condition            |
|----------|------|------|------|----------------------|
| T2       | 355  | 450  | mcd  | I <sub>F</sub> =20mA |
| U1       | 450  | 560  |      |                      |
| U2       | 560  | 710  |      |                      |

Note:

Tolerance of Luminous Intensity: ±11%

### Bin Range of Dominant Wavelength

| Bin Code | Min. | Max. | Unit | Condition |
|----------|------|------|------|-----------|
| B14      | 626  | 629  | nm   | IF =20mA  |
| B15      | 629  | 632  |      |           |
| B16      | 632  | 635  |      |           |


Note:

Tolerance of Dominant Wavelength: ±1nm

**Part Number: SML-LX2731SIC-ATR**


**Typical Electro-Optical Characteristics Curves**

**Typical Curve of Spectral Distribution**

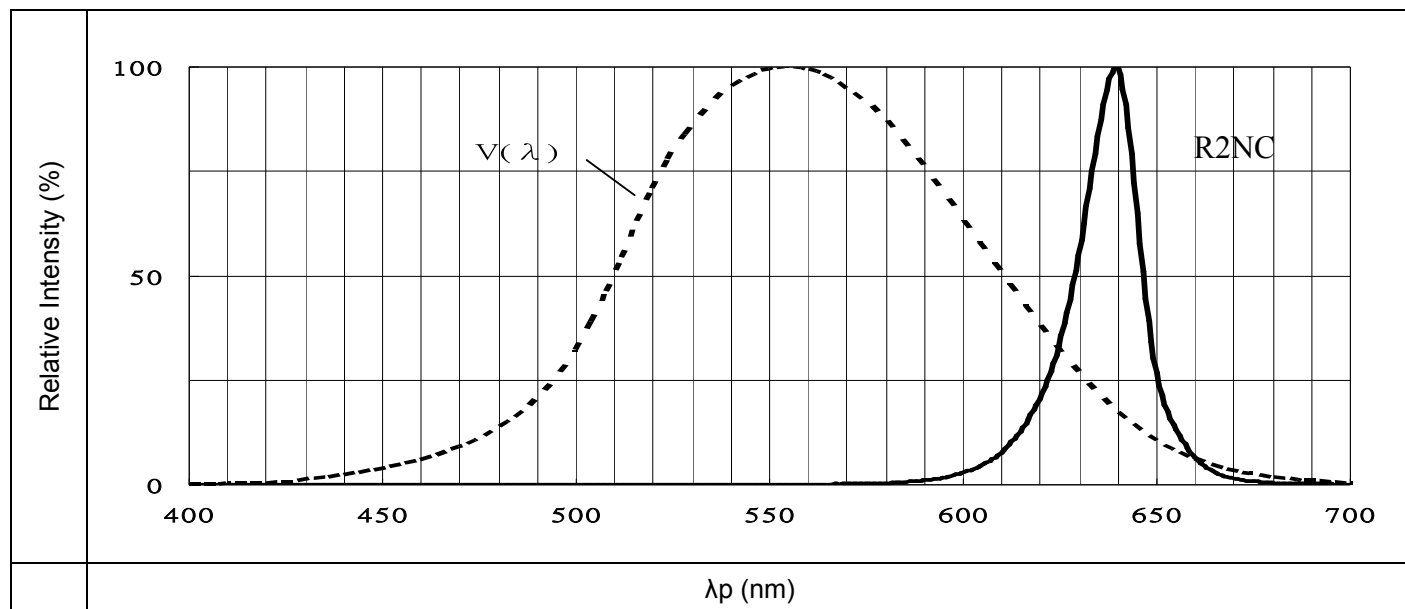


Note:  $V(\lambda)$ =Standard eye response curve;

**Diagram Characteristics of Radiation**

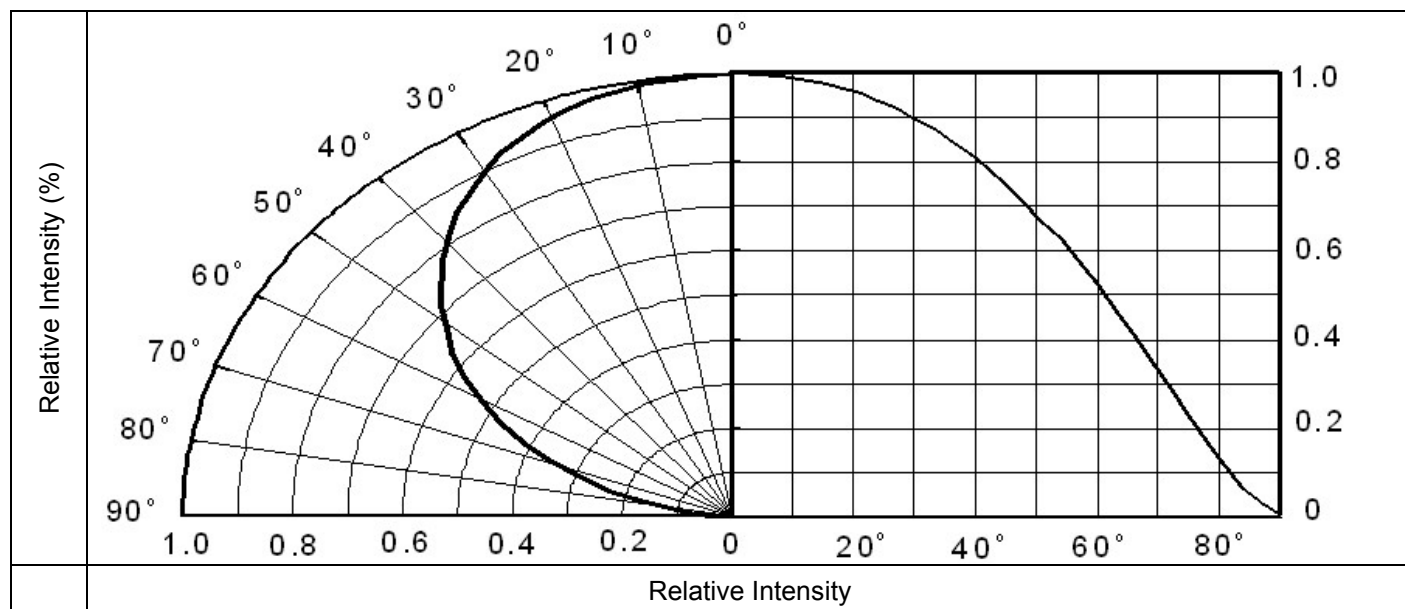


**Part Number: SML-LX2731SIC-ATR**


**Forward Current vs. Forward Voltage  
(Ta=25°C)**

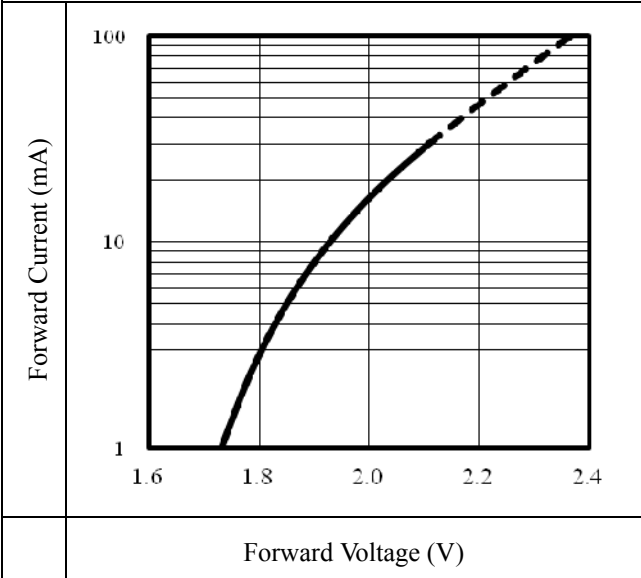


**Dominant Wavelength vs. Forward Current  
(Ta=25°C)**

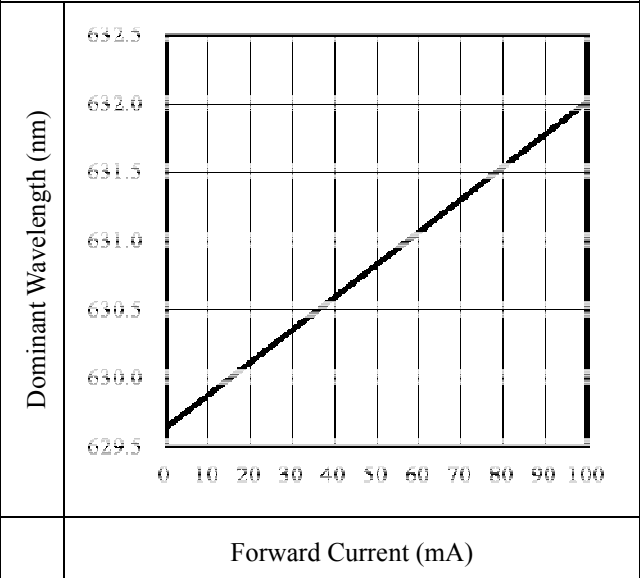


**Relative Luminous Intensity vs.  
Forward Current (Ta=25°C)**

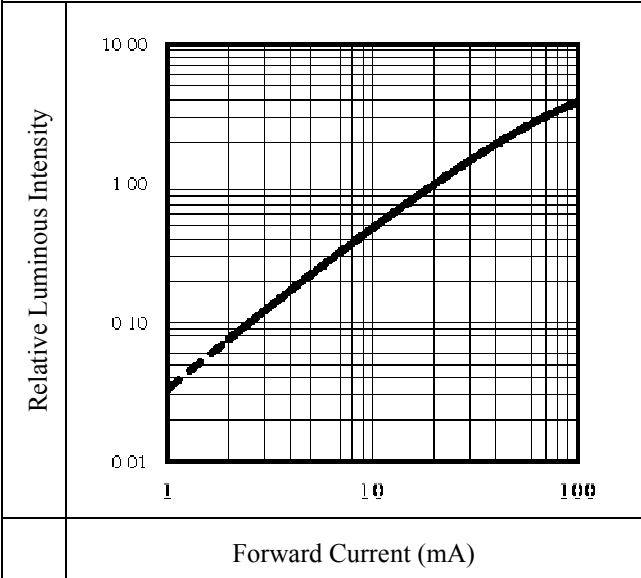

**Max. Permissible Forwarded Current  
(Ta=25°C)**

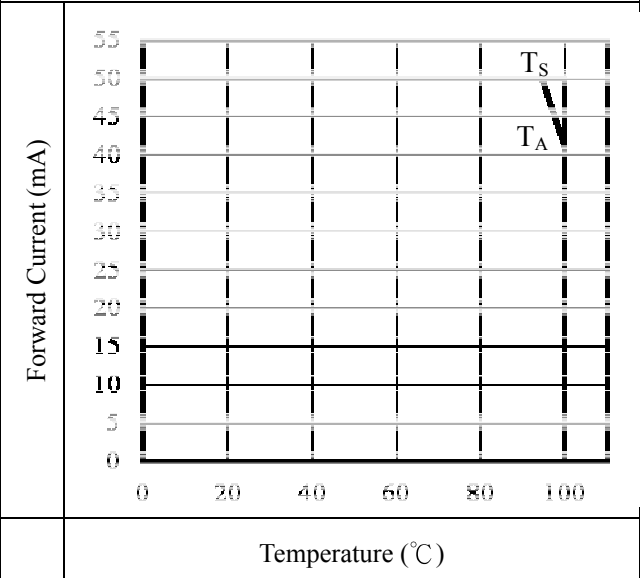

**Part Number: SML-LX2731SIC-ATR**

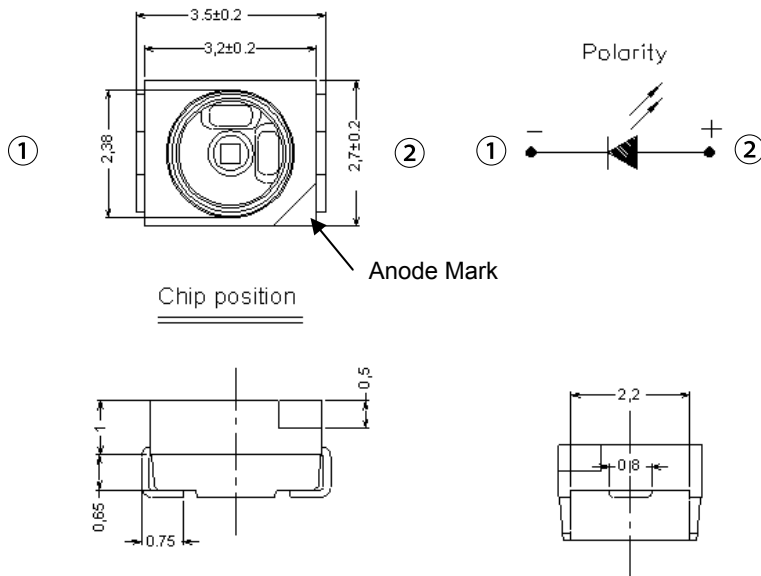


Note: Tolerances unless mentioned  $\pm 0.1$  mm. Unit = mm


**Part Number: SML-LX2731SIC-ATR**

**Moisture Resistant Packing Materials**

**Reel Dimensions**

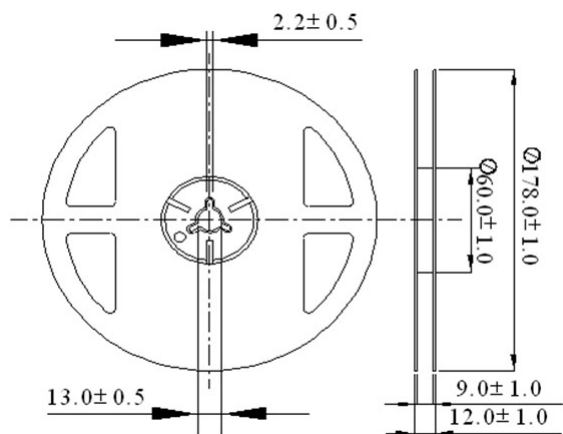


**Carrier Tape Dimensions: Loaded Quantity 2000 pcs Per Reel**

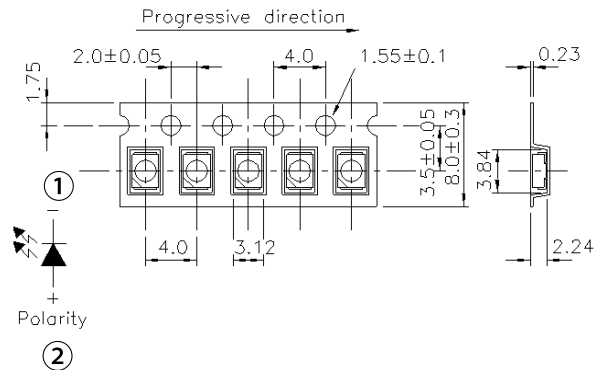

## Part Number: SML-LX2731SIC-ATR

### Moisture Resistant Packing Process

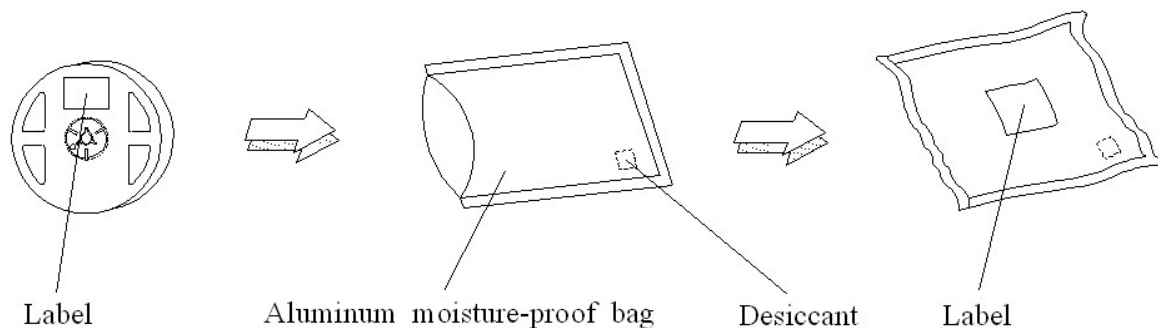


Note: Tolerances unless mentioned  $\pm 0.1\text{mm}$ . Unit = mm


### Precautions for Use

#### 1. Soldering Condition

##### 1.1 (A) Maximum Body Case Temperature Profile for evaluation of Reflow Profile

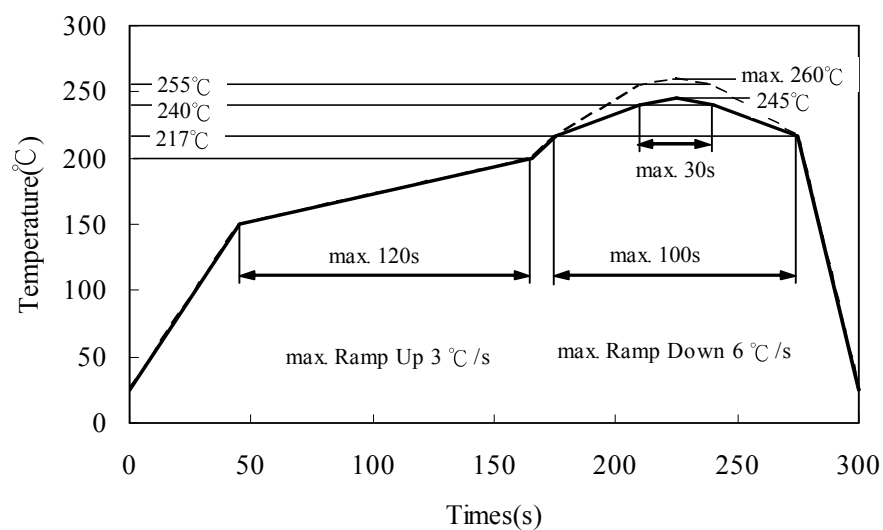

##### 1.2 (B) Recommend soldering pad

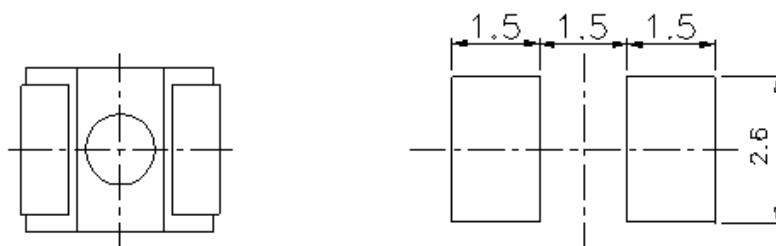

Note: Tolerances unless mentioned  $\pm 0.1\text{mm}$ . Unit = mm



## **Part Number: SML-LX2731SIC-ATR**

### **2. Current limiting**

A resistor should be used to limit current spikes that can be caused by voltage fluctuations. Otherwise damage could occur.

### **3. Storage**

3.1 Moisture proof bag should only be opened immediately prior to usage.

3.2 Environment should be less than 30°C and 60% RH when moisture proof bag is opened.

3.3 After opening the package MSL Conditions stated on page 1 of this spec should not be exceeded.

3.4 If the moisture sensitivity card indicates higher than acceptable moisture, the component should be baked at min. 60deg +/-5deg for 24 hours.

### **4. Iron Soldering**

Hand soldering is not recommended for regular production. These guidelines are for rework only. Soldering iron tip should contact each terminal no more than 3 sec at 350°C, using soldering iron with nominal power less than 25W. Allow min. 2 sec. between soldering intervals.

### **5. Usage**

Do not exceed the values given in this specification.

### **Application Restrictions**

High reliability applications such as military/aerospace, automotive safety/security systems, and medical equipment may require different product. If you have any concerns, please contact before using this product in your application. This specification guarantees the quality and performance of the product as an individual component. Do not use this product beyond the specification described in this document.