



TOP VIEW POLARITY
ANODE $\leftarrow$ $\rightarrow$ CATHODE

LEAD FREE REELON PROFILE

10 SEC. MAX.

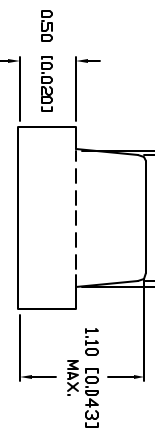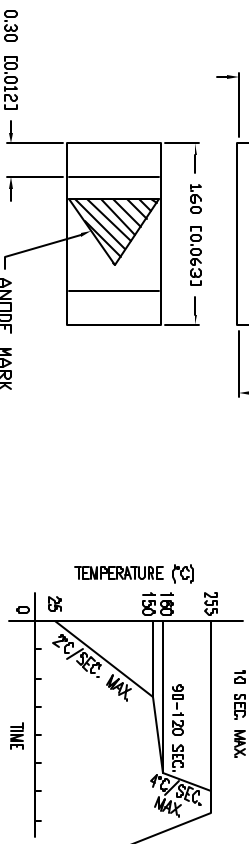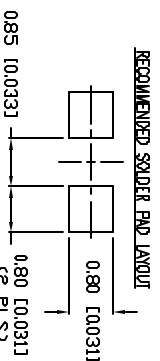

TOTAL TIME ABOVE 220°C IS 60 SECONDS MAX.

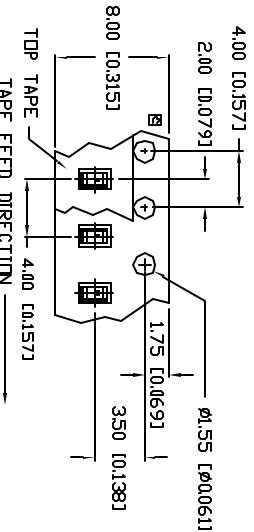

C2 PLS.)

UNLESS OTHERWISE SPECIFIED TOLERANCES PER ASME, PRECISION ARE: X=±1 (0.0048), XX=±0.5 (0.020), XXX=±0.25 (0.010), XXXX=±0.127 (0.005).

LEAD SIZE=±0.05 (0.002), LPO LENGTH=±0.75 (0.030), WIRE=±0.03

PART NUMBER

SML-LXFM0603UVC-TR

1.6mm x 0.8mm SURFACE MOUNT LED,
400nm ULTRA VIOLET LED,
WATER CLEAR LENS, TAPE AND REEL.

DISCLAIMER INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. NO PART OF THIS DOCUMENT IS TO BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM. LUMEX INC. SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING CONSEQUENTIAL DAMAGES, ARISING FROM THE USE OF THIS DOCUMENT. LUMEX INC. SHALL PROTECT SUCH INFORMATION IN THE FUTURE FROM DISCLOSURE AND REPRODUCTION TO ALL THIRD PARTIES.

OTHER MANY YEARS OF EXPERIENCE WITH INFORMATION INDUSTRY HAVE SHOWN THAT IT IS A MAJOR CAUSE OF ERROR AND FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

290 E. HELEN ROAD
PALATINE, IL 60067-8978
PHONE: +1.847.359.2780
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

NOTES:

1. THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER ESD HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

CAUTION: MOISTURE SENSITIVE DEVICE

PER JEDEC LEVEL 4 STANDARD

P6

DRAWN BY:

CT

CHECKED BY:

APPROVED BY: DATE: 10.16.06

PAGE: 1 OF 1
SCALE: N/A