


UNCONTROLLED DOCUMENT

PART NUMBER SMI - IXFS0402GC-TR




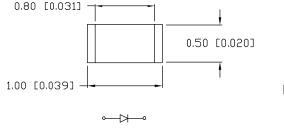







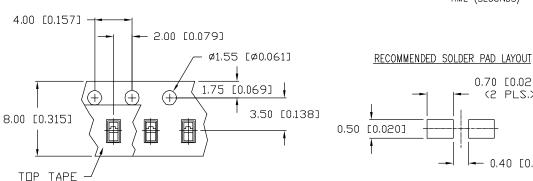

ELECTRO-OPTICAL CHARACTERISTICS TA=25°C If = 20mAPARAMETER MIN TYP MAX UNITS TEST COND PEAK WAVELENGTH 565 nm FORWARD VOLTAGE 2.2 2.6 ٧f REVERSE VOLTAGE 5.0 V_r $I_r=100\mu A$ AXIAL INTENSITY 10 mcd $I_f = 20 \text{mA}$ VIEWING ANGLE 120 2x theta EMITTED COLOR: **GREEN** EPOXY LENS FINISH: WATER CLEAR

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	160	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	125	mW
DERATE FROM 25°C	-1.2	mW/′C
OPERATING TEMP.	-40 TO +85	°C
STORAGE TEMP.	-40 TO +85	•C

* t<10µS

NOTES:

- 1. PARTS PACKAGED IN CONDUCTIVE COVER AND CARRIER TAPE.
- 2. THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.

CAUTION: MOISTURE SENSITIVE DEVICE PER JEDEC LEVEL 4 STANDARDS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION MAX.= +0.00 -DECIM

PART NUMBER SML-LXFS0402GC-TR

1.0mm x 0.5mm SURFACE MOUNT LED. 565nm GREEN LED, WATER CLEAR LENS. TAPE AND REEL.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

0.70 [0.028]

(2 PLS.)

0.40 [0.016]

RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E, HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com

TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY:

APPROVED BY: DATE:

1.6.03 PAGE: 1 OF 1

SCALE: N/A

REV.

TAPE FEED DIRECTION -

CT