



CAUTION: MOISTURE SENSITIVE DEVICE
PER JEDEC LEVEL 1 STANDARDS

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

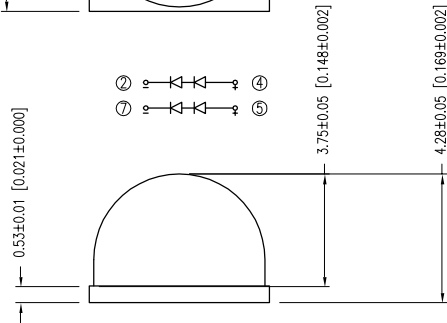

LEAD FREE REFLOW PROFILE



TOTAL TIME ABOVE 220°C IS 60 SECONDS MAX.

ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^\circ\text{C}$ $I_F=700\text{mA}$

PARAMETER	SYMBOL	MIN	TYP	MAX	UNITS	TEST COND
FORWARD VOLTAGE	V_F	6.00		8.00	V	$I_F=700\text{mA}$
REVERSE VOLTAGE	V_R	5.0			V	$I_R=10\mu\text{A}$
LUMINOUS FLUX	I_v	300		325	lm	$I_F=700\text{mA}$
COLOR TEMPERATURE		2580	3000	3710	K	
CRI			80			
VIEWING ANGLE			105		2x theta	
EMITTED COLOR:		WARM WHITE				
EPOXY LENS FINISH:		WATER CLEAR LENS				


LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT	1400	mA
STEADY CURRENT	800	mA
POWER DISSIPATION	2.0	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING TEMP.	-40 TO +90	°C
STORAGE TEMP.	-40 TO +100	°C

THERMAL PARAMETERS

PARAMETER	MAX	UNITS
JUNCTION TEMPERATURE	125	°C
THERMAL RESISTANCE	6	°C/W

SOLDER PAD LAYOUT

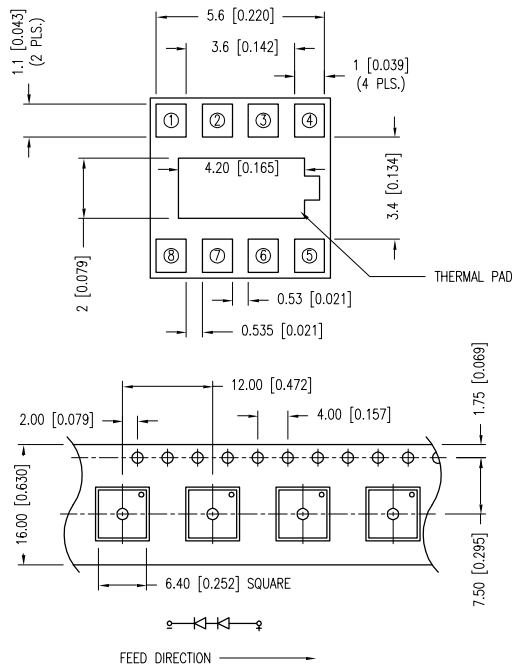

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX= +0.00 -DECIMAL PRECISION



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

5W, WARM WHITE SMT LED, 300lm, 3000K.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	10.14.10	DRAWN BY:	AB
PAGE:	1 OF 2	CHKD BY:	BC
SCALE:	N/A	APRVD BY:	KF
UNIT:	mm [INCH]		(P)

UNCONTROLLED DOCUMENT