



UNCONTROLLED DOCUMENT










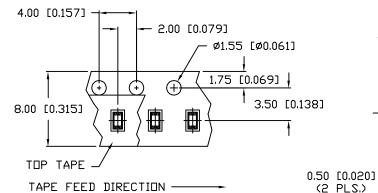



	REFLOW PROFILE
230 - MAXX. 200 175 175 175 175 175 175 175 175 175 175	8 SEC. MAX. 90–120 SEC.
	,

PART NUMBER SMI — I XTO603SISUGTR


REV.

ELECTRO-OPTICAL CHARACTERISTICS T _A =25°C			$I_f = 20 \text{mA}$		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		636 (RED)		nm	
		574 (GREEN)		nm	
FORWARD VOLTAGE (R/G)		2.0/2.2	2.6	V_{f}	
REVERSE VOLTAGE	5.0			v_r	Ir=100µA
AXIAL INTENSITY (R/G)		60/40		mcd	If = 20mA
VIEWING ANGLE		140		2x theta	
EMITTED COLOR: YELLOW/GREEN					
EPOXY LENS FINISH: WATE	R CLE	EAR			

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(R/G)	30/25	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.2	mW/°C
OPERATING TEMP.		-30 TO +80	•C
STORAGE TEMP.		-40 TO +85	•c

^{*} t<10µS

RECOMMENDED SOLDER PAD LAYOUT



NOTES:

1. THE CATHODE IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.

CAUTION: MOISTURE SENSITIVE DEVICE PER JEDEC LEVEL 4 STANDARDS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 -DECIMAL PRECISION MAX.= +0.00 -DECIM

290 E. HELEN ROAD

REV.

PART NUMBER SML-LXT0603SISUGTR

1.6mm x 0.8mm PCB CHIP, SURFACE MOUNT LED, AllnGaP RED/GREEN LED, MILKY WHITE DIFFUSED LENS.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE:

11.4.03

PAGE: 1 OF 1 SCALE: N/A

CT