

REV.



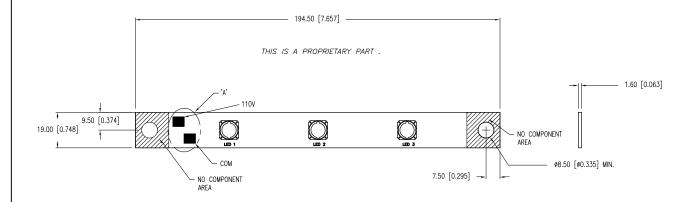

- NOTES:
  1. SSA-LX3939UWC-TR. (3 PCS)
  2. 18 AWG WIRE, WHITE=COM.
- 3. 18 AWG WIRE, RED=110V.
- 4. HEAT SHRINK SLEEVING (4" LONG) TO BE APPLIED OVER TWO WIRES. GAP BETWEEN SLEEVING AND PCB BOARD SHOULD NOT EXCEED MORE THAN 0.125mm MAX.
- 5. AMP CONNECTOR #1-480698-0
- AMP TERMINAL # 350687-1.

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION  $UNCONTROLLED\ DOCUMENT$ 

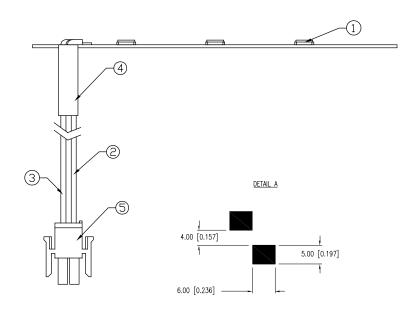

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM

WHITE LED HIGH FLUX BAR ARRAY, PURE WHITE.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\* COMPIDENTIAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLDE OF IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

	DATE:	09.11.09	DRAWN BY:	JN
	PAGE:	1 OF 1	CHKD BY:	ΥA
	SCALE:	N/A	APRVD BY:	JO
	UNIT:	mm [INCH]	(Pb)	