



DATE	REVISIONS	REV
11-18-93	RMV'D NOTE DENOTING COMMON CATHODE/	A
11-29-93	SCHEMATIC REDRAWN/	B
3-16-94	CHANGED DIMENSION	C
B-16-94	CHG'D. SOLDER SPECS.	D

DRAWING NUMBER
SSA-LXB10GW-10652


REV
D

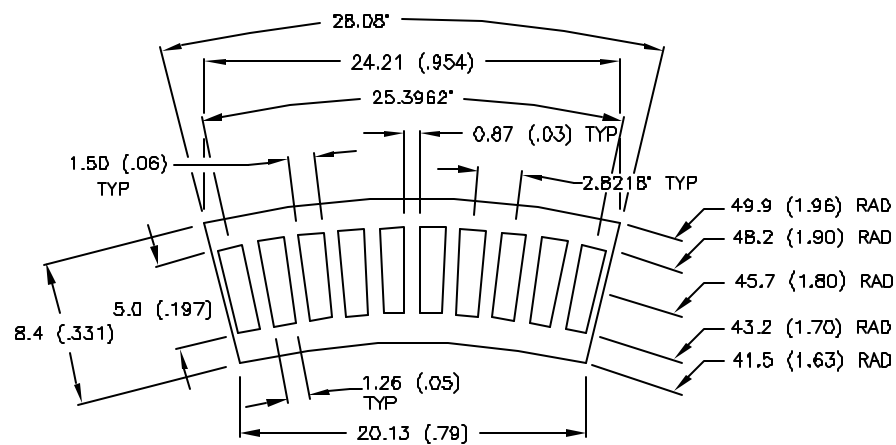


FRONT VIEW

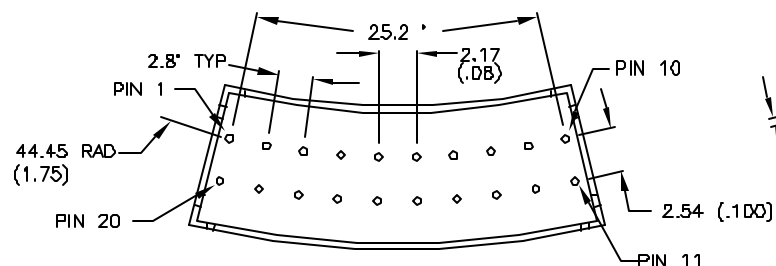

BACK VIEW

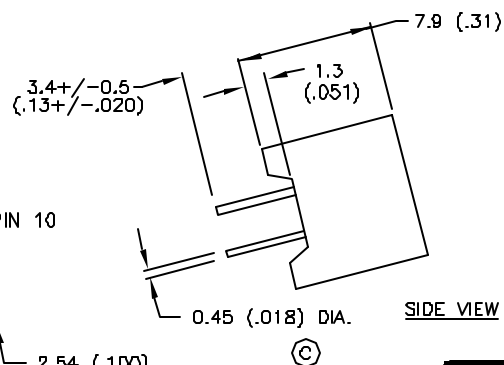

SIDE VIEW

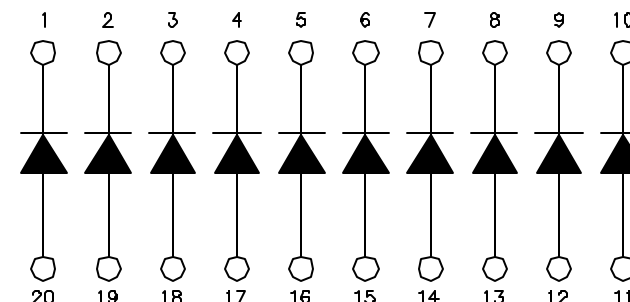

LUMEX
OPTO/COMPONENTS, INC.

292 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(708) 359-2790

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 7-9-91

DWN:

APPD:

SCALE: DO NOT SCALE DWG

CUSTOM 10 SEGMENT LED ARRAY, GREEN



PAGE 1 OF 2

DRAWING NUMBER
SSA-LXB10GW-10652

REV
D

DATE	REVISIONS	REV
	SEE PAGE ONE	D

DRAWING NUMBER	REV
SSA-LXB10GW-10652	D

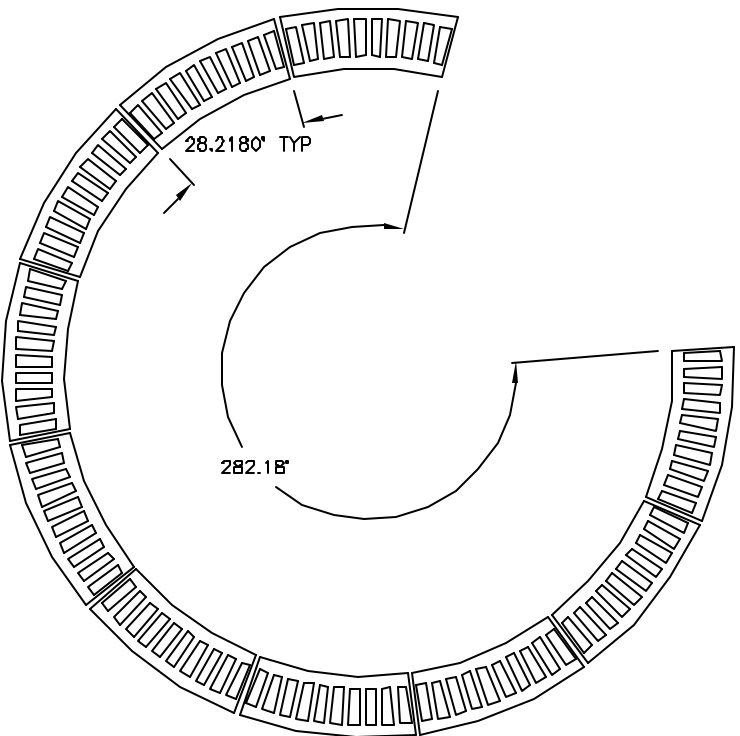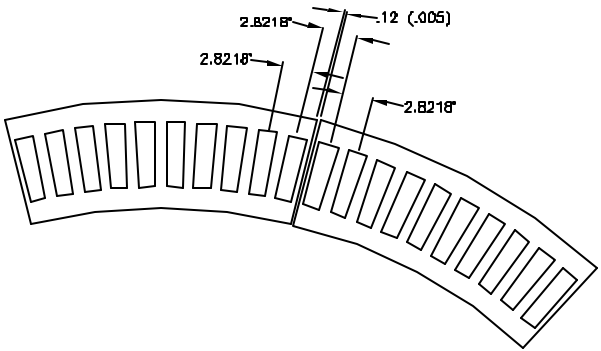

ELECTRO-OPTICAL CHARACTERISTICS TA=25 °C If=20mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565 (GREEN)		nm	
FORWARD VOLTAGE		2.1	2.8	V _f	
REVERSE VOLTAGE	5.0			V _r	I _r =100uA
AXIAL INTENSITY		10		mcd	I _f =20mA
VIEWING ANGLE		160		2x theta	
EMITTED COLOR :	GREEN				
EPOXY LENS FINISH:	MILKY WHITE DIFFUSED				

MATERIAL: NORYL
FACE COLOR: GRAY

LIMITS OF SAFE OPERATION AT 25 DEG. C		
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT *	155	mA
Ⓢ STEADY CURRENT	30	mA
Ⓢ POWER DISSIPATION	110	mW
DERATE FROM 25 °C	-1.2	mW/ °C
Ⓢ OPERATING, STORAGE TEMP.	-40 TO +85	°C
LEAD SOLDERING TEMP.	+260	°C
Ⓢ 2.0mm FROM BODY		3 SEC. MAX

* t<10uS



292 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(708) 359-2790

DATE: 7-9-91	DWN:	APPD:
SCALE: DO NOT SCALE DWG		
CUSTOM 10 SEGMENT LED ARRAY, GREEN		
PAGE 2 OF 2	DRAWING NUMBER SSA-LXB10GW-10652	REV D