

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION UNCONTROLLED DOCUMENT




9 290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM CUSTOM 10 SEGMENT LED ARRAY, SUPER RED


THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEN INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEN INC. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

UND/VOO/V//IOLLLD DOOD/WL/V/					
DATE:	03.09.95		DRAWN BY:	JH	
PAGE:	1 OF	2	CHKD BY:	KF	
SCALE:	N/A		APRVD BY:	SS	
UNIT: mm [INCH]		Pb)			

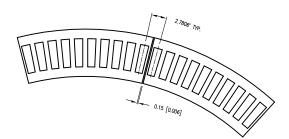

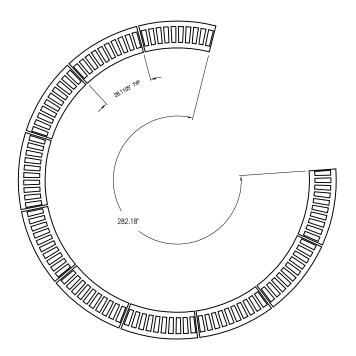

ELECTRO-OPTICAL CH	ARACTERISTIC	S T _A =25°C	$I_f = 20 \text{mA}$		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		660		nm	
FORWARD VOLTAGE		1.7	2.2	V f	
REVERSE VOLTAGE	4.0			٧r	I _r = 100µA
AXIAL INTENSITY		40		mcd	$I_f = 20mA$
VIEWING ANGLE		160		2x theta	
EMITTED COLOR:	RED				
EPOXY LENS FINISH:	MILKY WHIT	E DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	- 1.2	mW/*C
OPERATING, STORAGE TEMP.	-40 TO +85	•C
SOLDERING TEMP.	+ 260	•c
2.0mm FROM BODY	3	SEC. MAX

* t<10µS

MATERIAL: NORYL FACE COLOR: GRAY

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+}$ DECIMAL PRECISION UNCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

WEB: WWW.LUMEX.COM

CUSTOM 10 SEGMENT LED ARRAY, SUPER RED

THE SPECIFICATIONS MAY CHANSE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL REPORT AS LINFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROFICE TAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RECISION OF VOOD VITTO ELECT DOCUMENT						
	DATE:	03.09	.95	DRAWN BY:	Ę	
	PAGE:	2 OF	2	CHKD BY:	KF	
	SCALE:	N/	4	APRVD BY:	SS	
T	UNIT: mm [INCH]			Po		