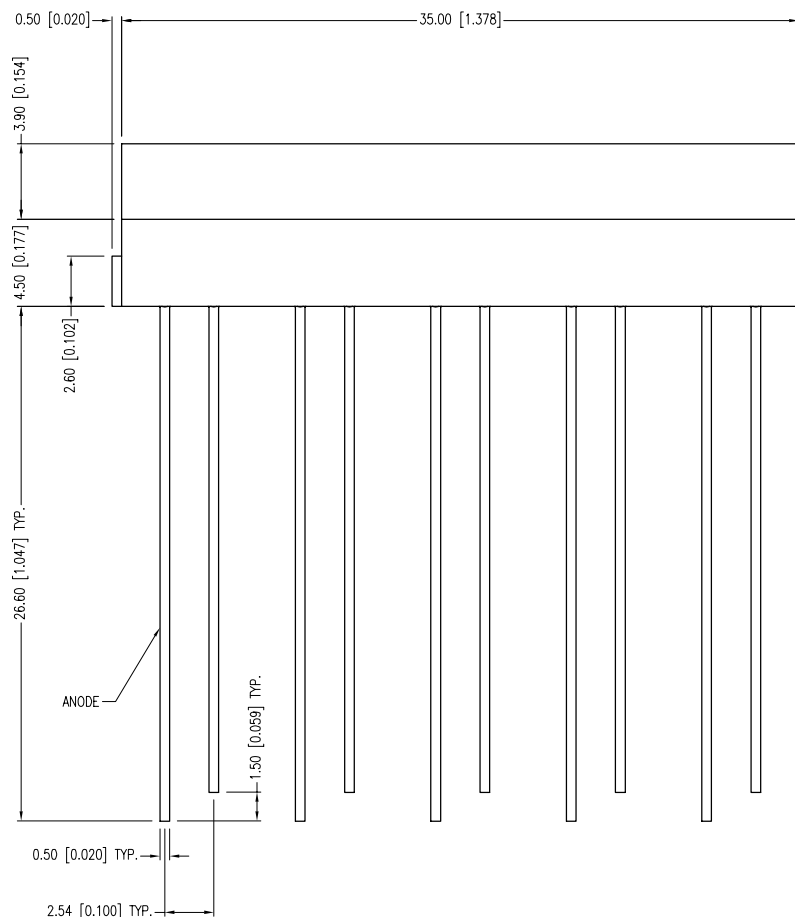
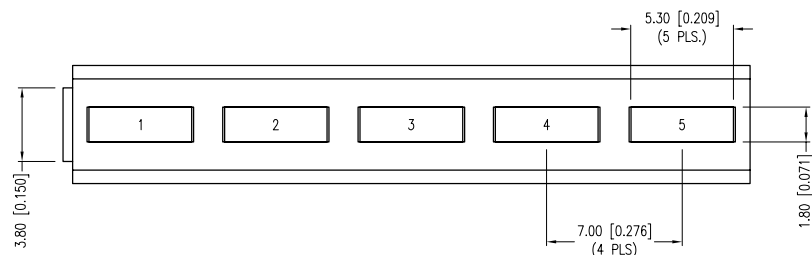
ELECTRO-OPTICAL CHARACTERISTICS $T_A=25^{\circ}\text{C}$ $I_f=20\text{mA}$

PARAMETER	GREEN	RED	UNITS	TEST COND
PEAK WAVELENGTH	565	635	nm	
FORWARD VOLTAGE (TYP.)	2.2	2.0	V_f	
FORWARD VOLTAGE (MAX.)	2.6	2.5	V_f	
REVERSE VOLTAGE	5.0	5.0	V_r	$I_r=100\mu\text{A}$
AXIAL INTENSITY	10	12	mcd	$I_f=20\text{mA}$
VIEWING ANGLE	110	110	2x theta	
LED POSITION:	1~4	5		
EPOXY LENS FINISH: DIFFUSED SAME AS EMITTED COLOR				


LIMITS OF SAFE OPERATION AT 25°C PER CHIP

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(G/R)	25/30	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.2	$\text{mW}/^{\circ}\text{C}$
OPERATING, STORAGE TEMP.		-40 TO +85	$^{\circ}\text{C}$
SOLDERING TEMP.		+260	$^{\circ}\text{C}$
2.0mm FROM BODY			3 SEC. MAX

* $t < 10\mu\text{s}$

NOTES:

1. SSL-LX2583GD, LED. (4 PCS.)
2. SSL-LX2583ID, LED. (1 PC.)
3. SSH-LXH525, HOLDER.
4. BACKFILL BOTTOM OF HOLDER WITH U.V. GLUE TO SECURE LEDS.

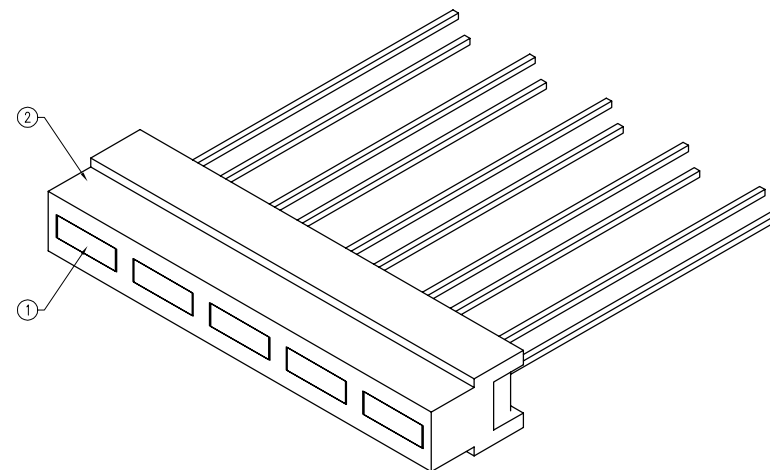

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.= +DECIMAL PRECISION -0.00 DECIMAL PRECISION MAX.= +0.00 DECIMAL PRECISION -0.00 DECIMAL PRECISION

UNCONTROLLED DOCUMENT