UNCONTROLLED DOCUMENT


SC:0.75

PART NUMBER

SSB-COB4461IGW

REV.

PRELIMINARY IN P/N DIR

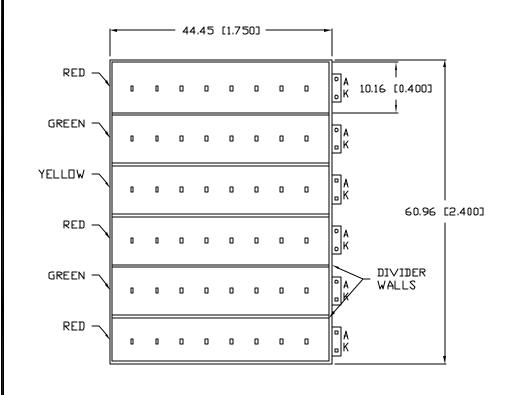



UNCONTROLLED DOCUMENT

*UNLESS DTHERWISE SPECIFIED TOLERANDES PER DECINAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECINAL PRECISION MAX.= +0.00 -DECINAL PRECIS

PART NUMBER
SSB—COB4461IGW

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HERBIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMNATION TO ALL THIRD PARTIES.

reliability note

Our many years of experience data accumulation indicate that scider heat is a major cause of early and future failure.

Please pay attention to your soldefing process.



GB

290 E. HELEN ROAD PALATINE, IL 60067—6976 PHONE: +1.847.359.2790 U\$ WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY: APPROVED BY:

APPROVED BY: DATE: 5.14.02 PAGE: 1 OF 1 SCALE: N/A