

PART NUMBER  
SSF-LXH101ID-SL(-1SL)REV.  
D

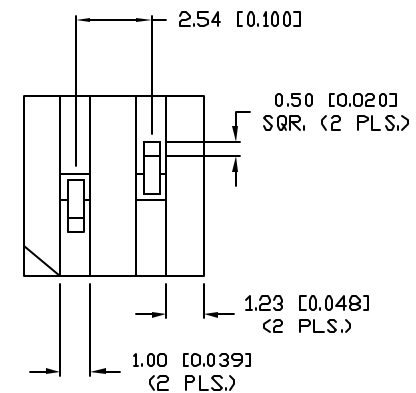
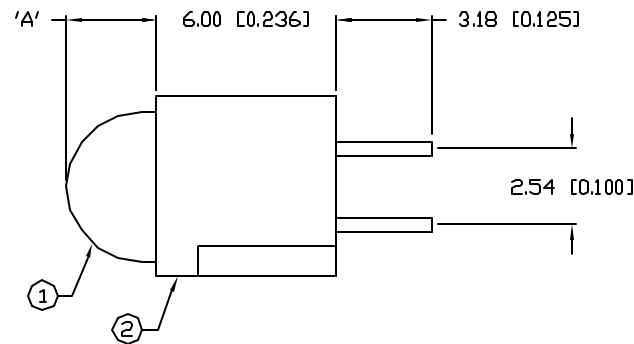
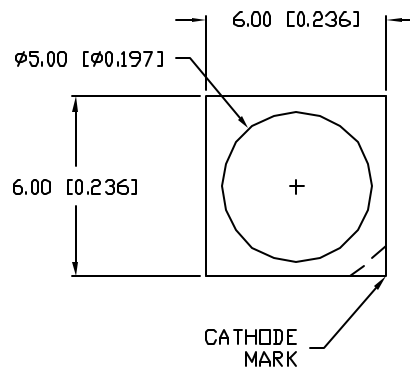
| REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE     |
|------|-------------------------------------|----------|
| A    | REDRAWN.                            | 10-19-93 |
| B    | UPDATED SPECS.                      | 9-18-95  |
| C    | E.C.N. #10BRDR.                     | 10-28-97 |
| D    | E.C.N. #10457 & #10BRDR & REDRAWN./ | 8-27-98  |

## NOTE:

1. WITH -SL SUFFIX: SSL-LX507F3ID LED.  
WITH (-1SL) SUFFIX: SSL-LX509F3ID LED.
2. SSH-LXH101 HOLDER. MATERIAL: BLACK  
NYLON (66), UL 94V-0 RATING.

## DIM 'A':

WITH -SL SUFFIX: DIM 'A' = 3.0mm.  
WITH (-1SL) SUFFIX: DIM 'A' = 4.5mm.

ELECTRO-OPTICAL CHARACTERISTICS  $T_A=25^\circ\text{C}$   $I_f=20\text{mA}$ 

| PARAMETER          | MIN          | TYP       | MAX | UNITS    | TEST COND            |
|--------------------|--------------|-----------|-----|----------|----------------------|
| PEAK WAVELENGTH    |              | 635 (RED) |     | nm       |                      |
| FORWARD VOLTAGE    |              | 2.0       | 2.5 | $V_f$    |                      |
| REVERSE VOLTAGE    | 5.0          |           |     | $V_r$    | $I_f=100\mu\text{A}$ |
| AXIAL INTENSITY    |              | 40        |     | mcd      | $I_f=20\text{mA}$    |
| VIEWING ANGLE      |              | 60        |     | 2x theta |                      |
| EMITTED COLOR:     | RED          |           |     |          |                      |
| EPOXY LENS FINISH: | RED DIFFUSED |           |     |          |                      |

LIMITS OF SAFE OPERATION AT  $25^\circ\text{C}$ 

| PARAMETER                      | MAX        | UNITS                |
|--------------------------------|------------|----------------------|
| PEAK FORWARD CURRENT*          | 150        | mA                   |
| STEADY CURRENT                 | 30         | mA                   |
| POWER DISSIPATION              | 105        | mW                   |
| DERATE FROM $25^\circ\text{C}$ | -1.2       | mW/ $^\circ\text{C}$ |
| OPERATING, STORAGE TEMP.       | -40 TO +85 | $^\circ\text{C}$     |
| SOLDERING TEMP.                | +260       | $^\circ\text{C}$     |
| 2.0mm FROM BODY                | 3 SEC. MAX |                      |

\*  $t < 10\mu\text{s}$ \*UNLESS OTHERWISE SPECIFIED TOLERANCE IS  $\pm 0.25\text{mm}$  ( $\pm 0.010"$ )

| REV.                                                                      | PART NUMBER           | CONFIDENTIAL INFORMATION                                                                                                                                                                                                                                                                                                     | LUMEX INCORPORATED                                                                                                                                                                         | 290 E. HELLEN ROAD<br>PALATINE, ILLINOIS 60067<br>PHONE: 1-847-359-2790<br>WEB: HTTP://WWW.LUMEX.COM |
|---------------------------------------------------------------------------|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------|
| D                                                                         | SSF-LXH101ID-SL(-1SL) | THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES. | RELIABILITY NOTE<br>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS. |                                                                                                      |
| T-5mm (T-1 3/4) LED FAULT INDICATOR,<br>635nm RED LED, RED DIFFUSED LENS. |                       | DRAWN BY: BC<br>CHECKED BY:<br>APPROVED BY:<br>DATE: 1-15-93<br>PAGE: 1 OF 1<br>SCALE: N/A                                                                                                                                                                                                                                   |                                                                                                                                                                                            |                                                                                                      |