


DRAWING NUMBER SSF-LXH103GD-UC	REV C
-----------------------------------	----------

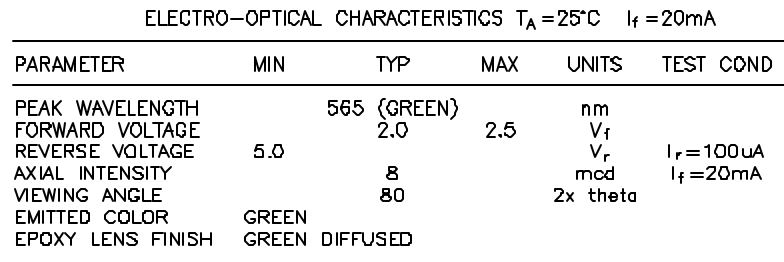

LIMITS OF SAFE OPERATION AT 25°C		
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.4	mW/°C
OPERATING, STORAGE TEMP	-40 TO +85	°C
LEAD SOLDERING TEMP	+260	°C
2.0mm FROM BODY		3 SEC. MAX

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE, PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

NOTES

1. SSH-LXH103 HOLDER.
2. SSL-LX3044GD LED.



290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(847) 359-2790

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 11-30-95	OWN:	CHK'D:	APPD:
SCALE: N/A			

T-3 (T-1) RIGHT ANGLE FAULT INDICATOR,
GREEN DIFFUSED WITH UNCUT LEADS

PAGE 1 OF 1	DRAWING NUMBER SSF-LXH103GD-UC	REV C
-------------	-----------------------------------	----------