
| PART NUMBER | SSF-LXH103SID-04                    | REV. | С    |
|-------------|-------------------------------------|------|------|
| DATE        | E.C.N. NUMBER AND REVISION COMMENTS |      | REV. |
| 12.26.01    | E.C.N. #10824.                      |      | Α    |
| 07.29.02    | E.C.N. #10895.                      |      | В    |
| 10.13.11    | E.C.N. #10BRDR.                     |      | С    |

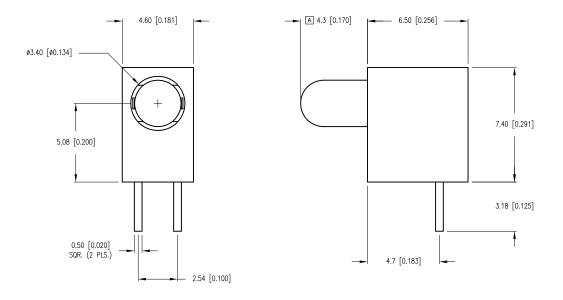

| В | ELECTRO-OPTICAL CHA | $I_f = 20 \text{mA}$ |     |     |          |                       |
|---|---------------------|----------------------|-----|-----|----------|-----------------------|
|   | PARAMETER           | MIN                  | TYP | MAX | UNITS    | TEST COND             |
|   | PEAK WAVELENGTH     |                      | 636 |     | nm       |                       |
|   | FORWARD VOLTAGE     |                      | 2.0 | 2.5 | Vf       |                       |
|   | REVERSE VOLTAGE     | 5.0                  |     |     | $V_r$    | I <sub>r</sub> =100μΑ |
|   | AXIAL INTENSITY     |                      | 100 |     | mcd      | $I_f = 20 \text{mA}$  |
|   | VIEWING ANGLE       |                      | 60  |     | 2x theta |                       |
|   | EMITTED COLOR:      | RED                  |     |     |          |                       |
|   | EPOXY LENS FINISH:  | RED DIFFUSED         |     |     |          |                       |

| LIMITS | 0F | SAFF | OPERATION | ΑT | 25°C |
|--------|----|------|-----------|----|------|

| PARAMETER                | MAX          | UNITS      |
|--------------------------|--------------|------------|
| PEAK FORWARD CURRENT*    | 150          | mA         |
| STEADY CURRENT           | 30           | mA         |
| POWER DISSIPATION        | 105          | mW         |
| DERATE FROM 25°C         | - 1.6        | mW/°C      |
| OPERATING, STORAGE TEMP. | -40  TO  +85 | °C         |
| SOLDERING TEMP.          | + 260        | °C         |
| 2.0mm FROM BODY          |              | 3 SEC. MAX |
|                          |              |            |

<sup>\*</sup> t<10µS

## NOTES:

- 1. SSH-LXH103 HOLDER.
- 2. SSL-LX306F4SID LED.

|         | 111                       |
|---------|---------------------------|
| $\sim$  |                           |
| ANODE - | $\mathbb{M}_{\mathbb{M}}$ |

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 |

T—3mm SINGLE LEVEL, FAULT INDICATOR, SUPER HIGH INTENSITY RED, RED DIFFUSED.

DATE: 10.13.11 DRAWN BY:

PAGE: 1 OF 1 CHKD BY:

SCALE: NTS APRVD BY:

mm [INCH]

UNIT:

UNCONTROLLED DOCUMENT

AΒ

SS

SS

(Pb)

290 E. HELEN ROAD T-3mm SINGLE LEVEL, FAULT INDICE
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TI

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDENTIAL INFORMATION

FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM CONFIDENTIAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. SEPECHFOLIALY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

## Creating LED and LCD Solutions Together