


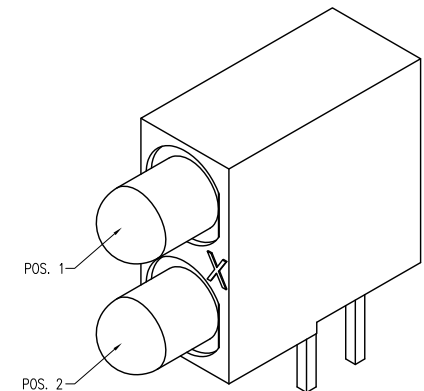

| LIMITS OF SAFE OPERATION AT 25°C |            |       |
|----------------------------------|------------|-------|
| PARAMETER                        | MAX        | UNITS |
| PEAK FORWARD CURRENT*            | 150        | mA    |
| STEADY CURRENT                   | 30/25      | mA    |
| POWER DISSIPATION                | 105        | mW    |
| DERATE FROM 25°C                 | -1.6       | mW/°C |
| OPERATING TEMP.                  | -40 TO +85 | °C    |
| STORAGE TEMP.                    | -40 TO +85 | °C    |
| SOLDERING TEMP.                  | +260       | °C    |
| 2.0mm FROM BODY                  | 3          | SEC.  |

1. SSL-LX3054AD, AMBER LED.
2. SSL-LX3054GD, GREEN LED.
3. SSH-LXH2103 HOLDER.

UNCONTROLLED DOCUMENT

|                 |              |
|-----------------|--------------|
| DATE: 06.26.12  | DRAWN BY: AB |
| PAGE: 1 OF 1    | CHKD BY: DT  |
| SCALE: NTS      | APRVD BY: DT |
| UNIT: mm [INCH] | (P6)         |