

PART NUMBER

SSF-LXH303YD-RP

REV.

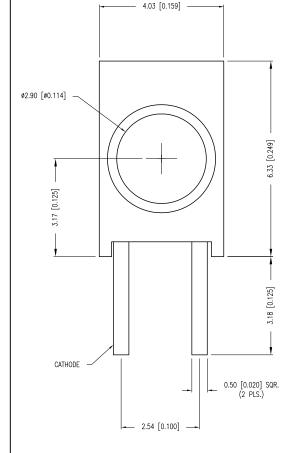

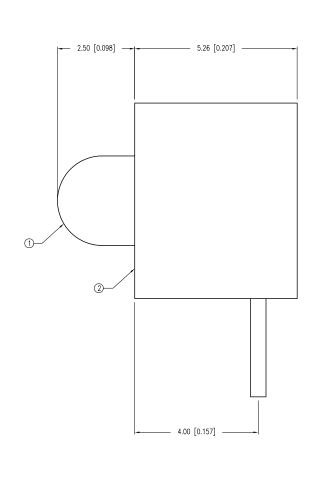

LECTRO-OPTICAL CHARACTERISTICS TA = 25°C			$I_f = 20 \text{mA}$		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	5	85 (YELLOW)		nm	
ORWARD VOLTAGE		2.1	2.5	V _f	
REVERSE VOLTAGE	5.0			V_r	I _r =100uA I _f =20mA
XIAL INTENSITY		30		mcd	I _f =20mA
'IEWING ANGLE		60		2x theta	
MITTED COLOR:	YELLOW				
POXY LENS FINISH:	YELLOW	DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.6	mW/*C
PERATING TEMP.	-40 TO +85	*C
STORAGE TEMP.	-40 TO +85	*C
SOLDERING TEMP.	+260	*C
.0mm FROM BODY		3 SEC. MAX

* t<10uS

RELIABILITY NOTE:
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION
INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

- 1. SSL-LX3044YD, YELLOW LED. 2. SSH-LXH303 HOLDER, BLACK NYLON, UL 94V-0.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.00}$ MAX.= $^{+0.00}_{-0.00}$ PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.00}$ PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.00}$ PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.00}$ PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.0 LINICONITROLLED DOCLIMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM

T-3mm (T-1) LED FAULT INDICATOR, 585nm YELLOW LED, YELLOW DIFFUSED LENS.	TOR, 585nm YELLOW LED, YELLOW DIFFUSED LENS.
--------------------------------------------------------------------------	----------------------------------------------

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

CONTRIBET AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN HIVELE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

CISION DIVEDIVIRULLED DOCUMENT					
	DATE: 09.11.91	DRAWN BY: BC			
	PAGE: 1 OF 1	CHKD BY: -			
	SCALE: N/A	APRVD BY: -			
	UNIT: mm [INCH]	Po			