

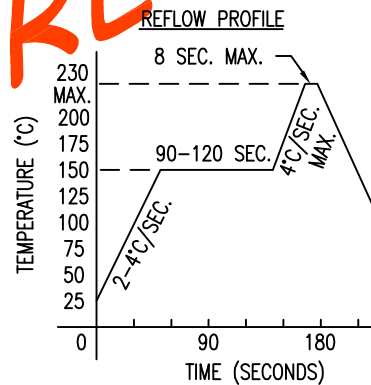
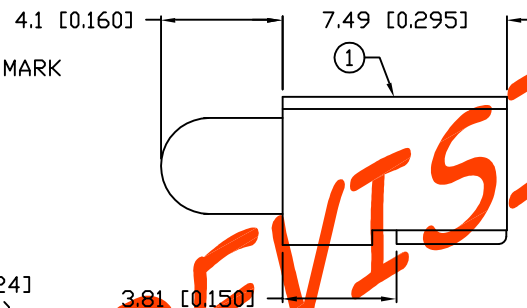
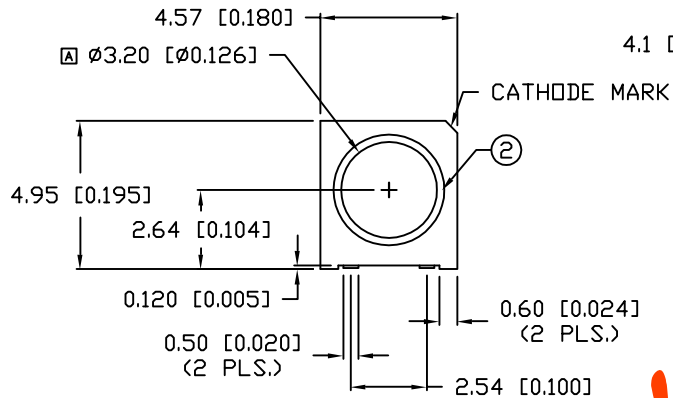
UNCONTROLLED DOCUMENT

PART NUMBER  
SSF-LXH306SRD-TR

REV.

A

| REV. | E.C.N. NUMBER AND REVISION COMMENTS | DATE     |
|------|-------------------------------------|----------|
| A    | E.C.N. #11447.                      | 10.01.07 |

ELECTRO-OPTICAL CHARACTERISTICS  $T_A=25^\circ\text{C}$   $I_f=20\text{mA}$ 

| PARAMETER          | MIN          | TYP | MAX | UNITS          | TEST COND            |
|--------------------|--------------|-----|-----|----------------|----------------------|
| PEAK WAVELENGTH    |              | 660 |     | nm             |                      |
| FORWARD VOLTAGE    |              | 1.7 | 2.2 | V <sub>f</sub> |                      |
| REVERSE VOLTAGE    | 5.0          |     |     | V <sub>r</sub> | $I_r=100\mu\text{A}$ |
| AXIAL INTENSITY    |              | 200 |     | mcd            | $I_f=20\text{mA}$    |
| VIEWING ANGLE      |              | 60  |     | 2x theta       |                      |
| EMITTED COLOR:     | RED          |     |     |                |                      |
| EPOXY LENS FINISH: | RED DIFFUSED |     |     |                |                      |

LIMITS OF SAFE OPERATION AT 25°C

| PARAMETER                | MAX        | UNITS      |
|--------------------------|------------|------------|
| PEAK FORWARD CURRENT*    | 150        | mA         |
| STEADY CURRENT           | 30         | mA         |
| POWER DISSIPATION        | 105        | mW         |
| DERATE FROM 25°C         | 1.6        | mW/°C      |
| OPERATING, STORAGE TEMP. | -40 TO +85 | °C         |
| SOLDERING TEMP.          | +260       | °C         |
| 2.0mm FROM BODY          |            |            |
| * $t < 10\mu\text{s}$    |            | 3 SEC. MAX |

## NOTES:

- SSH-LXH306 HOLDER, BLACK NYLON.
- SSL-LX308F4SRD LED.
- LXP-CARRIER24-56.
- 1,000 PCS. PER REEL.

A

Pb

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=+DECIMAL PRECISION MAX.=+0.00 -DECIMAL PRECISION

|                                                                                  |                                 |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |                                            |                                                                                                                             |
|----------------------------------------------------------------------------------|---------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| REV.<br>A                                                                        | PART NUMBER<br>SSF-LXH306SRD-TR | CONFIDENTIAL INFORMATION<br>THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.<br>RELIABILITY NOTE<br>OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS. | LUMEX<br>We Take Precision To Work For You | 290 E. HELEN ROAD<br>PALATINE, IL 60067-6976<br>PHONE: +1.847.359.2790<br>US WEB: www.lumex.com<br>TW WEB: www.lumex.com.tw |
| T-3mm LED, RIGHT ANGLE SURFACE MOUNT,<br>660nm SUPER RED LED, RED DIFFUSED LENS. |                                 | DRAWN BY:<br>CT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | CHECKED BY:                                | APPROVED BY: DATE: 8.29.01<br>PAGE: 1 OF 1<br>SCALE: N/A                                                                    |