


DATE	REVISIONS	REV
9-23-96	E.C.N. #10244./	A

DRAWING NUMBER
SSF-LXH340YGGD

REV
A

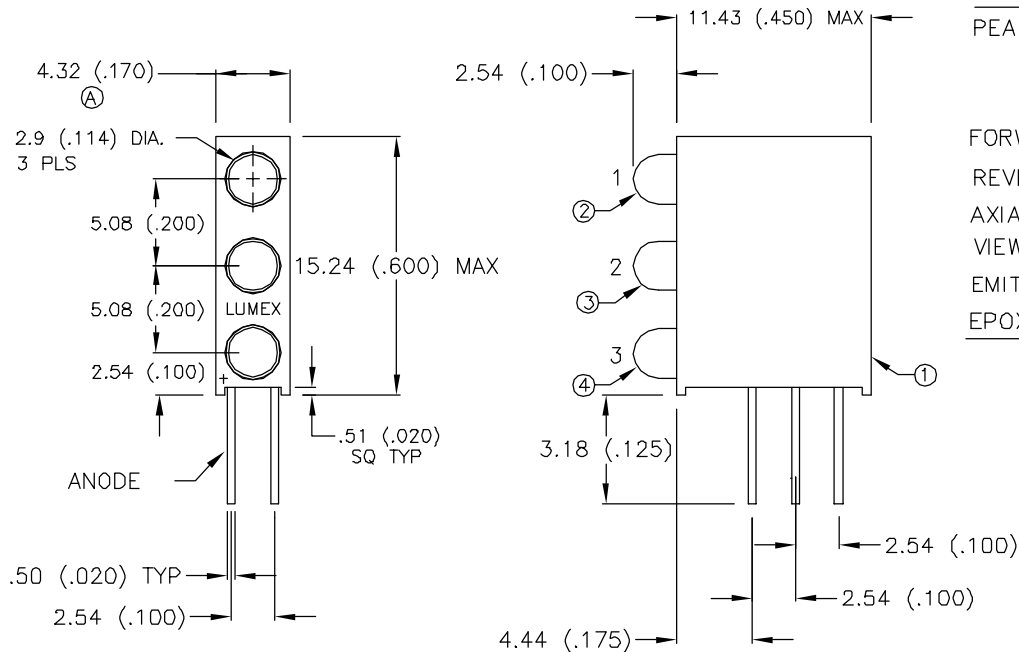

ELECTRO-OPTICAL CHARACTERISTICS TA=25 °C I _f =20mA					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	POS. 1	585 (YELLOW)		nm	
	POS. 2	565 (GREEN)		nm	
	POS. 3	565 (GREEN)		nm	
FORWARD VOLTAGE		2.1	2.8	V _f	
REVERSE VOLTAGE	5.0			V _r	I _r =100uA
AXIAL INTENSITY		15		mcd	I _f =20mA
VIEWING ANGLE		80		2x theta	
EMITTED COLOR:	POS. 1-YEL	POS. 2-GRN	POS. 3-GRN		
EPOXY LENS FINISH:	POS. 1-YELLOW DIFF./POS. 2 & 3 GREEN DIFF.				

LIMITS OF SAFE OPERATION AT 25 DEG. C		
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT *	150	mA
STEADY CURRENT(Y/G)	30/25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25 °C	-1.6	mW/ °C
OPERATING, STORAGE TEMP.	-40 TO +85	°C
LEAD SOLDERING TEMP.	+260	°C
2.0mm FROM BODY		3 SEC. MAX

* t<10uS

BILL OF MATERIALS:

- SSH-LXH340 HOLDER. MATERIAL: BLACK NYLON 94V-0.
- SSL-LX3044YD LED.
- SSL-LX3044GD LED.
- SSL-LX3044GD LED.

RELIABILITY NOTE:

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
OPTO COMPONENTS INC.

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
(847) 359-2790

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX OPTO/COMPONENTS, INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX OPTO/COMPONENTS, INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 10-9-95	DWN:	CHK'D:	APPD:
SCALE: N/A			

T-3mm LED, RIGHT ANGLE FAULT INDICATOR,
YELLOW/GREEN/GREEN DIFFUSED

PAGE 1 OF 1

DRAWING NUMBER
SSF-LXH340YGGD

REV
A