


PART NUMBER		SSF-LXH409-59IGWCA	REV.	B
REV.	E.C.N. AND REVISION COMMENTS		DATE	
A	E.C.N #10836		2.14.02	
B	ECN-Lumex201700088		10.17.17	

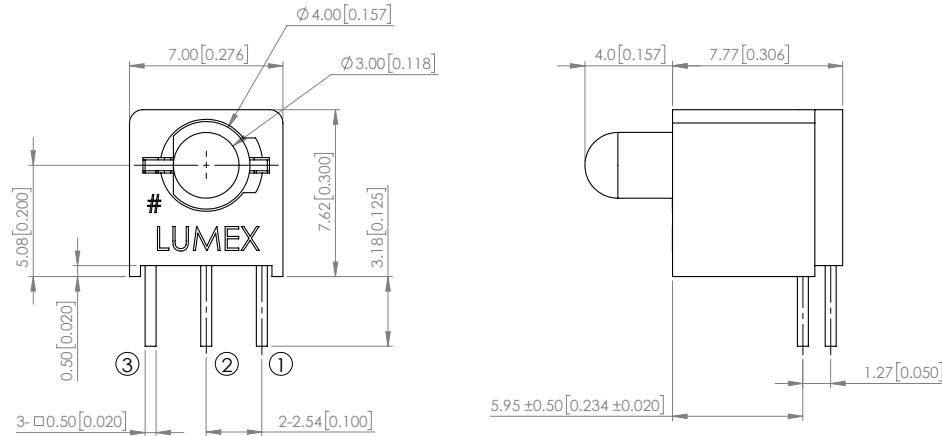

ELECTRO-OPTICAL CHARACTERISTIC TA=25°C

PARAMETER		MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	RED	-	627	-	nm	If=20mA
	GREEN	-	565	-		If=20mA
FORWARD VOLTAGE	RED	-	2	2.5	V	If=20mA
	GREEN	-	2.2	2.5		If=20mA
REVERSE CURRENT	RED	-	-	10	uA	Vr=5V
	GREEN	-	-	10		Vr=5V
LUMINOUS INTENSITY	RED	1.2	3	-	mcd	If=20mA
	GREEN	3	8	-		If=20mA
VIEWING ANGLE		-	60	-	2x theta1/2	-
EMITTED COLOR	RED/GREEN					
EPOXY LENS FINISH	WHITE DIFFUSED					

ABSOLUTE MAXIMUM RATINGS TA=25°C

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT (RED/GREEN) *	160/140	mA
FORWARD CURRENT (RED/GREEN)	30/25	mA
REVERSE VOLTAGE (RED/GREEN)	5/5	V
POWER DISSIPATION (RED/GREEN)	75/62.5	mW
STORAGE TEMPERATURE	-40 to +85	°C
OPERATING TEMPERATURE	-40 to +85	°C

*1/10 Duty Cycle, 0.1ms Pulse Width.

NOTES :

ITEM	P/N	DESCRIPTION
1	SSH-LXH409	BLACK HOLDER
2	SSL-LX3059IGW-CA	BICOLOR LED

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN= *DECIMAL PRECISION 0.00, MAX= *DECIMAL PRECISION 0.00



425 N. GARY AVE.
CAROL STREAM, IL 60188
PHONE : 800-278-5666
FAX : 630-315-2150
WEB : WWW.LUMEX.COM

RIGHT ANGLE INDICATOR, 3 LEADS, COMMON ANODE, GaAsP 627nm RED LED/GaP 565 GREEN LED BICOLOR, WHITE DIFFUSED LENS

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE : 2017.10.17	DRAWN BY : K.Y.
PAGE : 1 OF 1	CHKD BY : E.C.
SCALE : NTF	APRVD BY : G.Y.
UNIT : mm [INCH]	(P6)