
PART NUMBER

SSI-LX5099IGW-150

REV.

2x theta

	t
(()	5.90 [0.232]
	ţ

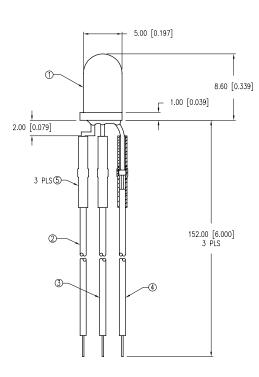

PARAMETER	COLOR	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH			635		nm	
			565		nm	
FORWARD VOLTAGE	(R/G)		2.1	2.5	V f	
REVERSE VOLTAGE		5.0			V r	$I_r = 100 \mu A$
AXIAL INTENSITY	(R/G)		10		mcd	$I_f = 20 \text{mA}$

60

EMITTED COLOR: RED/GREEN EPOXY LENS FINISH: MILKY WHITE DIFFUSED

ELECTRO-OPTICAL CHARACTERISTICS TA = 25°C

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER		MAX	UNITS
PEAK FORWARD CURRENT*	(R/G)	150	mA
STEADY CURRENT	(R/G)	30/25	mA
POWER DISSIPATION	(R/G)	105	mW
DERATE FROM 25°C		- 1.3	mW/*C
OPERATING TEMP.		- 40 TO +85	•C
STORAGE TEMP.		- 40 TO +85	•C
SOLDERING TEMP.		+ 260	•C
2.0mm FROM BODY		3	SEC. MAX

* t<10µS

VIEWING ANGLE

SSL-LX5099IGW.

- RED ANODE LEAD: 24 AWG STRANDED, RED INSULATION, CUT 160mm CATHODE LEAD: 24 AWG STRANDED, BLACK INSULATION, CUT 160mm
- 4. GREEN ANODE LEAD: 24 AWG STRANDED GREEN INSULATION, CUT 160mm
- 5. HEAT SHRINK TUBING (3 PLS).
- 6. CUT LED LEADS TO APPROX. 3/8" IN LENGTH.
- 7. CRIMP WIRE LEADS TO CUT LED LEADS.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.5 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION UNCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538

T-1 3/4 BICOLOR LED WITH 6" LEADS

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE: 05.28.97 DRAWN BY: JH PAGE: OF CHKD BY: JD SCALE: KF N/A APRVD BY: mm [INCH] (Pb) UNIT: