
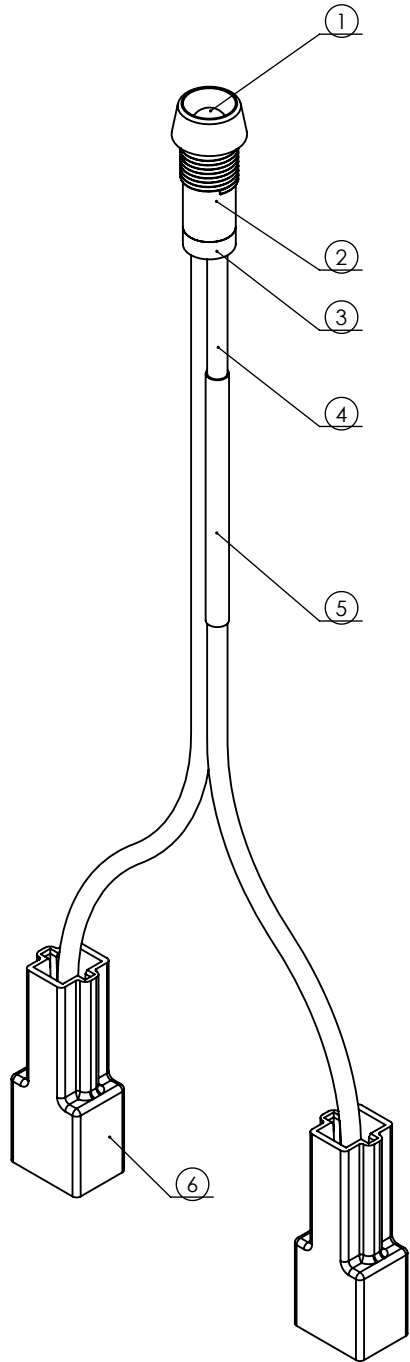


PART NUMBER		SSI-LXR9126SIC240V	REV	A
REV	E.C.N. NUMBER AND REVISION COMMENTS			DATE
A	ECN-Lumex202000004			01.21.20

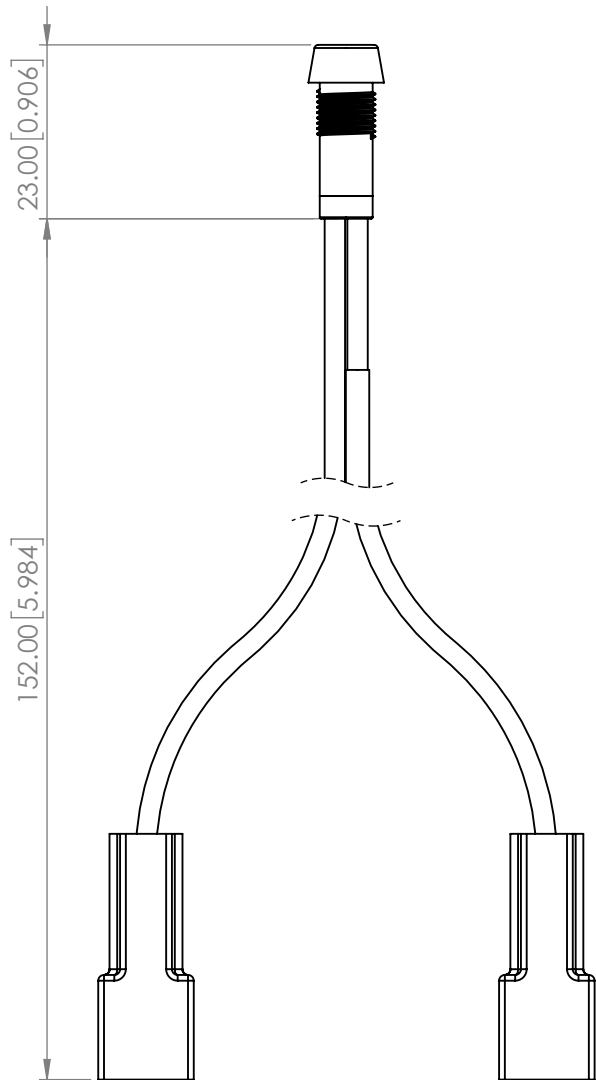


ELECTRO-OPTICAL CHARACTERISTIC TA=25°C

PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH	-	636	-	nm	-
FORWARD VOLTAGE	-	240	-	Vf	-
AXIAL INTENSITY	-	300	-	mcd	Vf=240VAC
VIEWING ANGLE	-	140	-	2x theta1/2	-
OPERATING TEMP.	-40	-	85	°C	-
STORAGE TEMP.	-40	-	85	°C	-
EMITTED COLOR	RED				
EPOXY LENS FINISH	WATER CLEAR				

NOTES:

1. SSL-LX5093SIC
2. SSI-LXR9126
3. SSH-LX9126BSG-110V
4. 18AWG UL1015 STANDED WIRE (WHITE & BLACK)
5. HEAT-SHIRNK TUBE
6. FASTON HOUSING 480053-3 (2 PCS,CUSTOMER CONSIGN)
FASTON TAB 42460-2 (2 PCS,CUSTOMER CONSIGN)

CIRCUIT

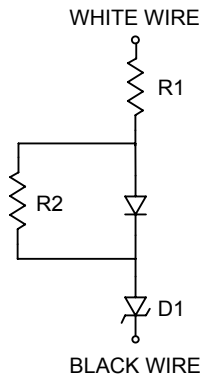

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}/_{-0.00} MAX.= ^{+0.00}/_{-DECIMAL PRECISION}



425 N. GARY AVE.
CAROL STREAM, IL 60188
PHONE : 800-278-5666
FAX : 630-315-2150
WEB : WWW.LUMEX.COM

T5mm 636nm SUPER RED LED PANEL INDICATOR, WATER CLEAR, 240VAC, 6" WIRE LEADS, WITH CONNECTOR

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE : 2020.01.07

DRAWN BY : E.C.

PAGE : 1 OF 1

CHKD BY : E.C.

SCALE : NTF

APRVD BY : G.Y.

UNIT : mm [INCH]

Pb