UNCONTROLLED DOCUMENT


SC:0.25


PART NUMBER

REV.

SSL-LX20333SID-BL

PRELIMINARY IN P/N DIR



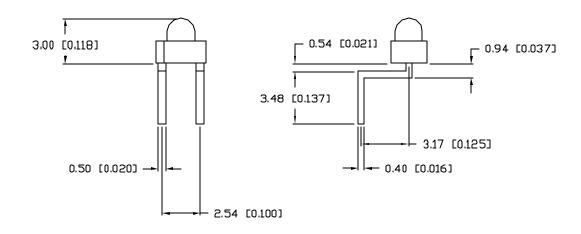

NOTES:

1.

UNCONTROLLED DOCUMENT

\*UNLESS OTHERWISE SPECIFED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), XX=±0.5 (±0.039), XX=±0.5 (±0.039), XX=±0.5 (±0.030), XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.0102), LEAD LENGTH=±0.75 (±0.030). NN=+DECIMAL PRECISION NAX.=+0.00 (±0.0102), XXX=±0.127 (±0.005).

REV.

PART NUMBER SSL-LX20333SID-BL

CUSTOM LEAD BEND LED.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF

LUMEX NO. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



KS/CT

290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY: CHECKED BY:

APPROVED BY: DATE: PAGE:

5.8.02 1 OF 1 SCALE: N/A