


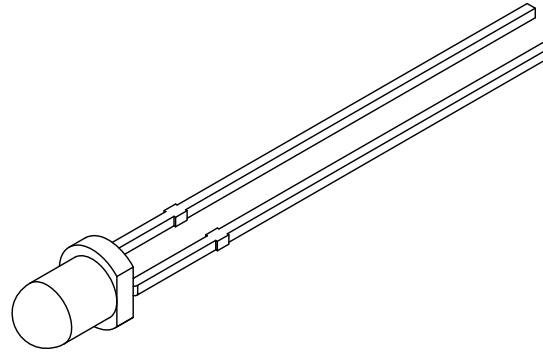

LIMITS OF SAFE OPERATION AT 25°C		
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	200	mA
STEADY CURRENT	20	mA
POWER DISSIPATION	110	mW
DERATE FROM 25°C	-1.2	mW/°C
OPERATING TEMP.	-40 TO +85	°C
STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+260	°C
2.0mm FROM BODY	3	SEC. MAX.

* t<10μS

UNCONTROLLED DOCUMENT

DATE: 03.01.13	DRAWN BY: MA
PAGE: 1 OF 1	CHKD BY: DT
SCALE: NTS	APRVD BY: DT
UNIT: mm [INCH]	(Pb)