
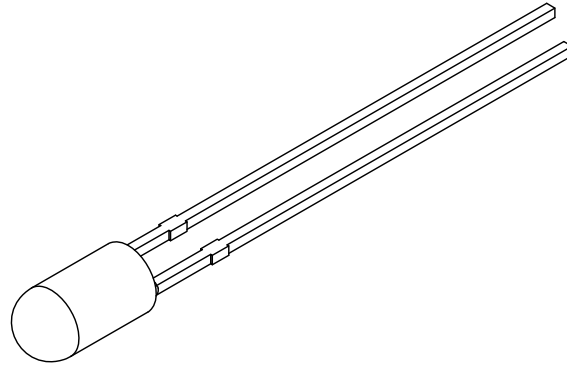


PART NUMBER	SSL-LX306F4AD	REV.	A
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
07.06.11	E.C.N. #10BRDR. & REDRAWN.		A

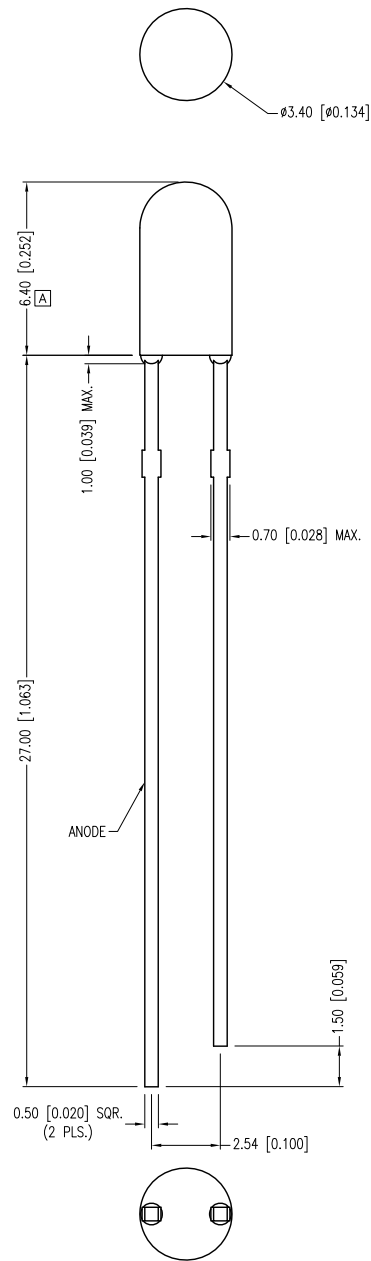

ELECTRO-OPTICAL CHARACTERISTICS Ta=25°C		If=20mA			
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		610		nm	
FORWARD VOLTAGE		2.0	2.5	Vf	
REVERSE VOLTAGE	5.0			Vr	Ir=100μA
AXIAL INTENSITY		30		mcd	If=20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR:	AMBER				
LENS FINISH:	AMBER DIFFUSED				

LIMITS OF SAFE OPERATION AT 25°C			
PARAMETER	MAX	UNITS	
PEAK FORWARD CURRENT*	150	mA	
STEADY CURRENT	30	mA	
POWER DISSIPATION	105	mW	
DERATE FROM 25°C	-1.6	mW/°C	
OPERATING TEMP.	-40 TO +85	°C	
STORAGE TEMP.	-40 TO +85	°C	
SOLDERING TEMP.	+260	°C	
2.0mm FROM BODY	3	SEC.	

* t<10μs

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}_{-0.00} MAX.= ^{+0.00}_{-DECIMAL PRECISION}

UNCONTROLLED DOCUMENT