
## UNCONTROLLED DOCUMENT

PART NUMBER
SSL-LX308F4IGW

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
Α	E.C.N. #10BRDR. & REDRAWN IN 3D.	4.18.01
В	E.C.N. #11568.	05.12.09

ø3.20 [ø0.126] -

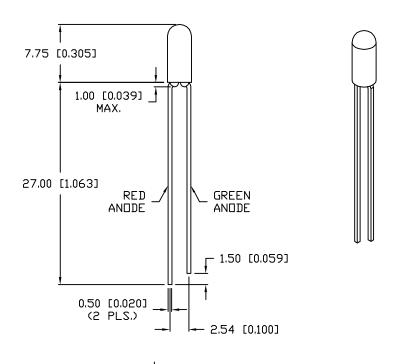

ELECTRO-OPTICAL CHARAC	LECTRO-OPTICAL CHARACTERISTICS $T_A=25^{\circ}C$ $I_f=2$		)mA		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		635 (RED)			_
		565 (GREEN)			
FORWARD VOLTAGE (R/G)		2.0/2.2	2.5/2.6	$V_{f}$	
REVERSE VOLTAGE	5.0			$V_{r}$	Ir=100µA
B AXIAL INTENSITY (R/G)		15/10		mcd	If = 20mA
VIEWING ANGLE		60		2x theta	
EMITTED COLOR: RE	D/GREEN	١			
FPOXY LENS FINISH: MII	KY WHIT	E DIFFUSED			

LIMITS OF SAFE OPERATION AT 25°C

PARAMETER	COLORS	MAX	UNITS
PEAK FORWARD CURRENT*		150	mA
STEADY CURRENT	(R/G)	30/25	mA
POWER DISSIPATION		105	mW
DERATE FROM 25°C		-1.6	mW/°C
OPERATING, STORAGE TEMP.		- 40 TO +85	•Ć
SOLDERING TEMP.		+ 260	•c
2.0mm FROM BODY			3 SEC. MAX

<sup>\*</sup> t<10µS

UNCONTROLLED DOCUME.

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.002), LEAD SIZE=±0.05 (±0.003). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.005). LEAD SIZE=±0.05 (±0.005). LEAD SIZE=±0.05 (±0.005). MIN=+DECIMAL PRECISION MAX.= +0.00 (±0.005). LEAD SIZE=±0.05 (±0.00

REV.

PART NUMBER SSL-LX308F4IGW

0.40 [0.016] (2 PLS.)

T-3mm (T-1) 635nm RED/565nm GREEN BICOLOR LED, MILKY WHITE DIFFUSED LENS.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APPROVED BY: DATE:

1.27.99 PAGE: 1 OF 1 SCALE: N/A