

UNCONTROLLED DOCUMENT

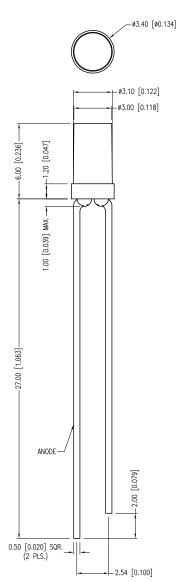

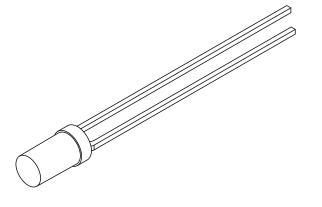

PART NUMBER	SSL-LX30FT14SRD	REV.	В			
DATE	E.C.N. NUMBER AND REVISION COMMENTS					
04.20.01	E.C.N. #10BRDR. & REDRAWN IN 3D.		Α			
07 12 12	F.C.N. #10BRDR & REDRAWN		В			

ELECTRO-OPTICAL	CHARACTERISTICS Ta=25	°C If=20mA			
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		660		nm	
FORWARD VOLTAGE		1.7	2.2	Vf	
REVERSE VOLTAGE	5.0			Vr	Ir=100µA
AXIAL INTENSITY		60		mcd	If=20mA
VIEWING ANGLE		100		2x theta	
EMITTED COLOR:	RED				
LENS FINISH:	RED TOP DIFFUSED				

PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	30	mA
POWER DISSIPATION	100	mW
DERATE FROM 25°C	-1.6	mW/*C
OPERATING TEMP.	-40 TO +85	•C
STORAGE TEMP.	-40 TO +85	*C
SOLDERING TEMP.	+260	•C
2.0mm FROM BODY	3	SEC.

* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= $^{+0.00}_{-0.00}$ MAX.= $^{+0.00}_{-0.00}$ MAX.= $^{+0.00}_{-0.000}$ MAX.= $^{+0.000}_{-0.000}$ MA UNCONTROLLED DOCUMENT



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM MEMBER OF ITW PHOTONICS GROUP

QUASAR	BRITE	T-3mm	(T-1)	FLAT	TOP	SUPER	RED	LED.	
									_

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	07.10.12	DRAWN BY:	AB	
PAGE:	1 OF 1	CHKD BY:	KF	
SCALE:	NTS	APRVD BY:	KF	
UNIT:	mm [INCH]	Pb		