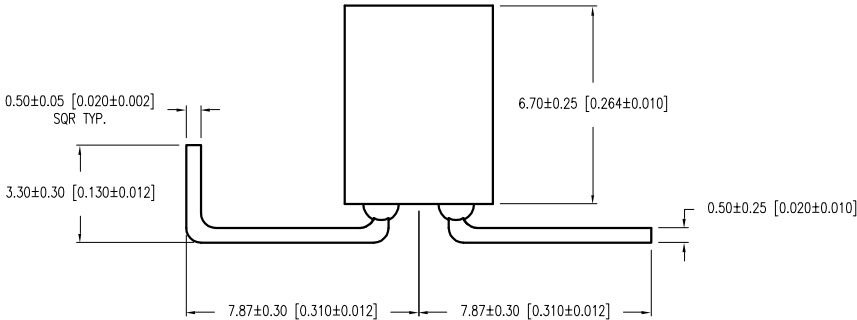
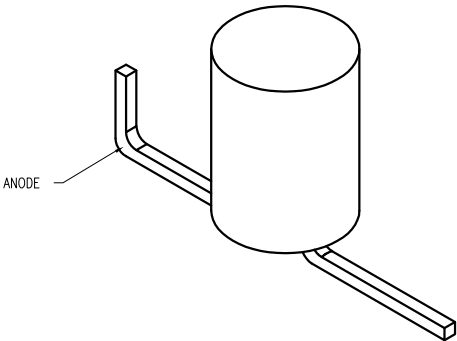
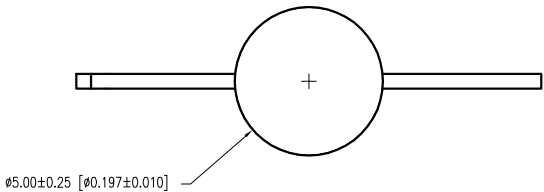


ELECTRO-OPTICAL CHARACTERISTICS T _A =25°C V _f = 14V					
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		590		nm	V _f = 14V
FORWARD CURRENT		10.5	13.5	mA	
REVERSE CURRENT	5.0			uA	I _r =10uA
AXIAL INTENSITY	1.8	6		mcd	V _f = 14V
VIEWING ANGLE		70		2x theta	
EMITTED COLOR:	YELLOW				
EPOXY LENS FINISH:	YELLOW TRANSPARENT				

LIMITS OF SAFE OPERATION AT 25°C		
PARAMETER	MAX	UNITS
PEAK FORWARD VOLTAGE*	16	V
STEADY CURRENT	9	mA
POWER DISSIPATION	160	mW
DERATE FROM 25°C	- 1.2	mW/°C
OPERATING, STORAGE TEMP.	-40 TO +85	°C
SOLDERING TEMP.	+ 260	°C
2.0mm FROM BODY	5	SEC. MAX

* t<10μS

NOTES:

1. CUSTOMER PART NUMBER #28-6306-2.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}_{-0.00} MAX= ^{+0.00}_{-DECIMAL PRECISION} UNCONTROLLED DOCUMENT