


CARRIER TAPE DIMENSION



SYMBOL ITEMS	OPTION CODE	SYMBOL	SPECIFICATIONS			
			Minimum		Maximum	
			mm	inch	mm	inch
Tape Feed Hole Diameter	--	D	3.8	0.15	4.2	0.17
Component Lead Pitch	--	F	2.3	0.09	3.0	0.12
Front-To-Rear Deflection	--	Δ H	--	--	2.0	0.08
Feed Hole To Bottom Of Component	TRS-1	H1	17.5	0.69	18.5	0.73
Feed Hole To Overall Component Height	--	H2	--	--	36	1.42
Feed Hole Pitch	--	P	12.4	0.49	13.0	0.51
Lead Location	--	P1	4.4	0.17	5.8	0.23
Center Of Compinent Location	--	P2	5.1	0.2	7.7	0.3
Overall Taped Package Thickness	--	T	--	--	1.42	0.06
Feed Hole Location	--	W0	8.5	0.33	9.75	0.38
Adhesive Tape Width	--	W1	14.5	0.57	15.5	0.61
Adhesive Tape Position	--	W2	0	0	4.0	0.16
Tape Width	--	W3	17.5	0.69	19.0	0.75

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= ^{+DECIMAL PRECISION}_{-0.00} MAX.= ^{+0.00}_{-DECIMAL PRECISION}

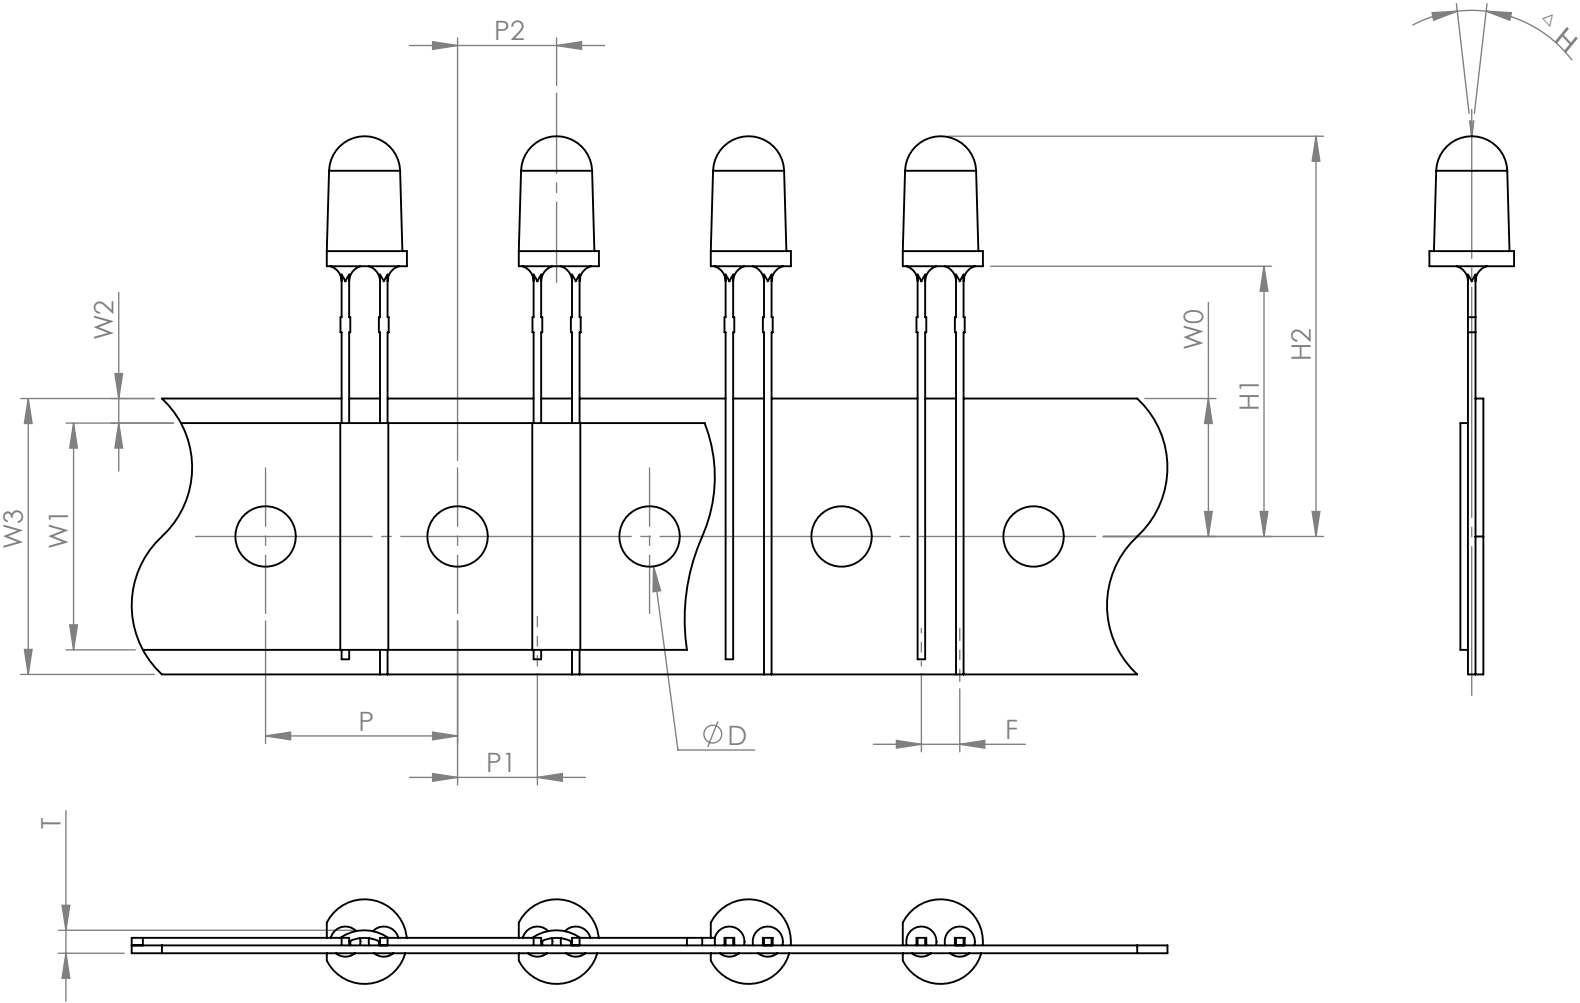

425 N. GARY AVE.
CAROL STREAM, IL 60188
PHONE : 800-278-5666
FAX : 630-315-2150
WEB : WWW.LUMEX.COM

5.6W*8.6H, QUASARBRITE T-5mm (T-1 3/4) 660nm SUPER RED LED, WATER CLEAR LENS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE : 2017.08.24

DRAWN BY : C.C.

PAGE : 2 OF 2

CHKD BY : G.Y.

SCALE : NTF

APRVD BY : E.C.

UNIT : mm [INCH]

