


UNCONTROLLED DOCUMENT

PART NUMBER
IFL-LX7367REV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	04.11-07

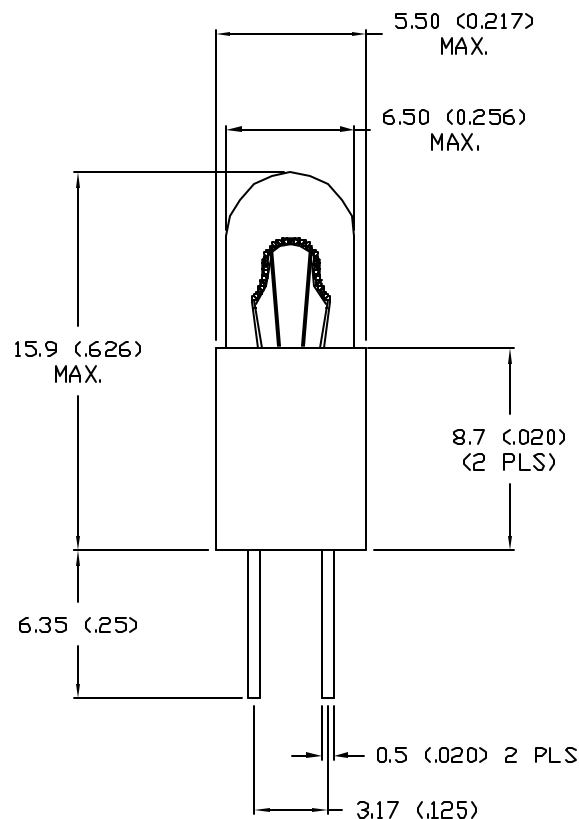

ELECTRO-OPTICAL SPECIFICATIONS

OPERATING VOLTAGE VAC OR VDC:	8-12
DESIGN VOLTAGE VAC OR VDC:	10
CURRENT DRAW @ DESIGN VOLTS:	40 mA
M.S.C.P. @ DESIGN VOLTS:	0.8
AVERAGE LIFE @ VAC DESIGN VOLTS:	5,000 HRS

MECHANICAL SPECIFICATIONS

BULB SIZE & SHAPE:	T 5mm
BULB GLASS TYPE:	K 12 SOFT GLASS
BASE TYPE:	BI-PIN (.125" CTNS)
FILAMENT SHAPE:	C-2F
L.C.L. IF APPLICABLE:	N/A

ENVIRONMENTAL SPECIFICATIONS

VIBRATION TESTING:	MIL-E-5400N, GRAPH IV
SHOCK:	MIL-STD-883 METHOD 2002 TEST COND A
OPERATING TEMPERATURE:	-50 TO +100 DEG. C
STORAGE TEMPERATURE:	-50 TO +125 DEG. C

NOTES:

1. BASE MARKINGS: LX7367 OR 10V .040A



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030), MIN.=^{+DECIMAL PRECISION}_{-0.00} MAX.=^{+0.00}_{-DECIMAL PRECISION}REV.
APART NUMBER
IFL-LX7367

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

T-1 3/4 BI-PIN INCANDESCENT LAMP.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 4.20.86 PAGE: 1 OF 1 SCALE: N/A
-----------------	-------------	--------------	---