


UNCONTROLLED DOCUMENT

PART NUMBER
IFL-LXAF829135225REV.
A

REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE
A	E.C.N. #11148.	4.13.07

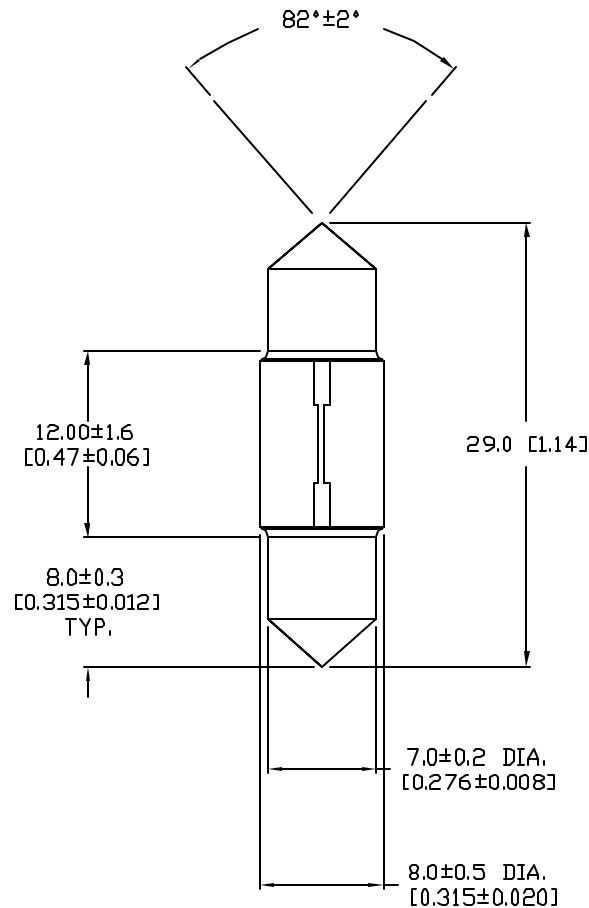


ELECTRO-OPTICAL SPECIFICATIONS

OPERATING VOLTAGE	:	13.5V
RATED CURRENT	:	225 mA @ 13.5V
LIGHT INTENSITY	:	14 LUMENS +/-5
AVERAGE LIFE	:	700 HRS (CATASTROPHIC)

PROCESS AND MATERIAL SPECIFICATIONS

BASE CAPS	:	S7 (2)
GLASS TYPE	:	SOFT K12
GLASS FILL	:	VACCUUM
FILAMENT	:	TUNGSTEN RHEENIUM ALLOY
AGING CYCLE	:	16 HRS MIN.



UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN.=^{+DECIMAL PRECISION}_{-0.00} MAX.=^{+0.00}_{-DECIMAL PRECISION}REV.
APART NUMBER
IFL-LXAF829135225

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
US WEB: www.lumex.com
TW WEB: www.lumex.com.tw

AXIAL FESTOON INCANDESCENT LAMP
78 x 29 S7 CAPS.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

DRAWN BY: JC	CHECKED BY:	APPROVED BY:	DATE: 8.26.93 PAGE: 1 OF 1 SCALE: N/A
-----------------	-------------	--------------	---