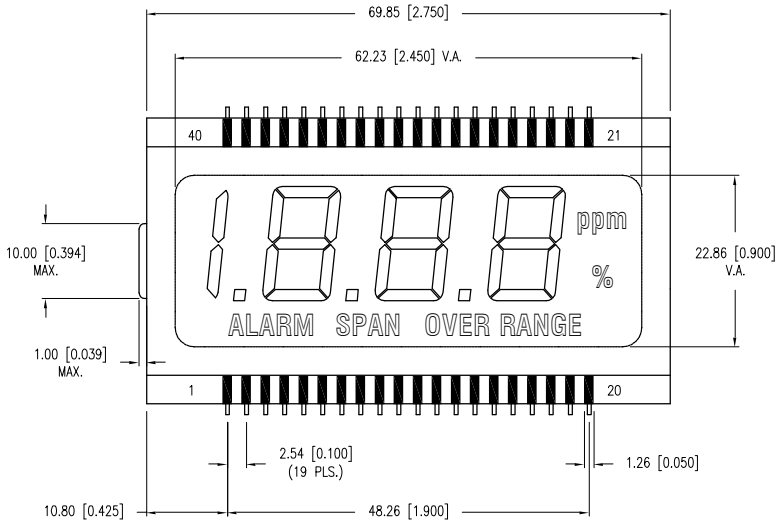


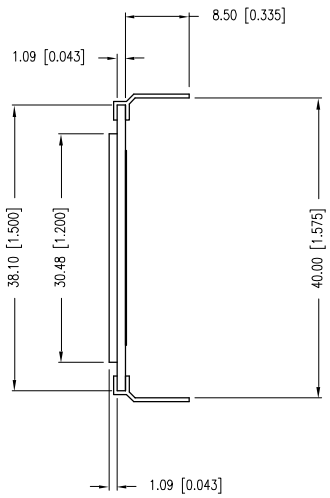


| CHARACTERISTICS | |
|---|---|
| FLUID TYPE: | EBTN NEGATIVE |
| BACKGROUND COLOR: | GRAY |
| VIEWING DIRECTION: | 12:00 |
| DISPLAY MODE: | TRANSMISSIVE |
| OPERATING VOLTAGE: | 5.0V A.C. |
| OPERATING TEMP. | 0°C TO 50°C |
| STORAGE TEMP. | -20°C TO 70°C |
| DRIVING METHODE: | STATIC, 1/2 BIAS |
| CONNECTION TYPE: | 40 PINS |

| PIN NO. | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 |
|---|---|---|---|---|---|---|---|---|---|---|
| SEGMENT | COM | DP1 | ALARM | N/C | 2D | 2C | DP2 | SPAN | N/C | 3D |
| PIN NO. | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 | 19 | 20 |
| SEGMENT | 3C | DP3 | OV RG | N/C | N/C | N/C | N/C | 4D | 4C | % |
| PIN NO. | 21 | 22 | 23 | 24 | 25 | 26 | 27 | 28 | 29 | 30 |
| SEGMENT | ppm | 4G | 4B | 4A | 4F | 4E | N/C | 3G | 3B | 3A |
| PIN NO. | 31 | 32 | 33 | 34 | 35 | 36 | 37 | 38 | 39 | 40 |
| SEGMENT | 3F | 3E | N/C | 2G | 2B | 2A | 2F | 2E | 1BC | COM |

GLASS DETAIL

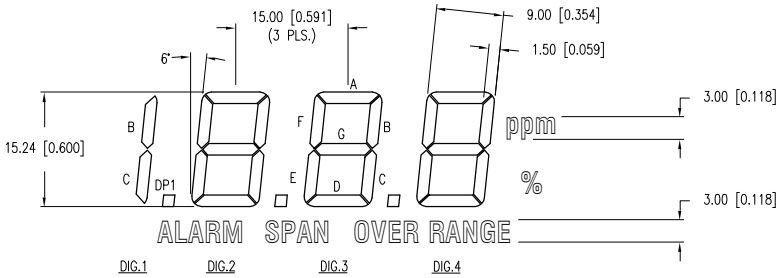


*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION −0.00 MAX.= +0.00 −DECIMAL PRECISION

UNCONTROLLED DOCUMENT

LUMEX®
Creating LED and LCD Solutions Together™

290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

0.60" CHARACTER HEIGHT, 3 1/2 DIGIT CUSTOM LCD GLASS, EBTN NEGATIVE, TRANSMISSIVE, TOP VIEW, 40 PINS.

**THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.**

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

| | | | |
|---|---|---|---|
| DATE: | 05.20.09 | DRAWN BY: | JN |
| PAGE: | 1 OF 1 | CHKD BY: | SA |
| SCALE: | N/A | APRVD BY: | BC |
| UNIT: | mm [INCH] | | |