
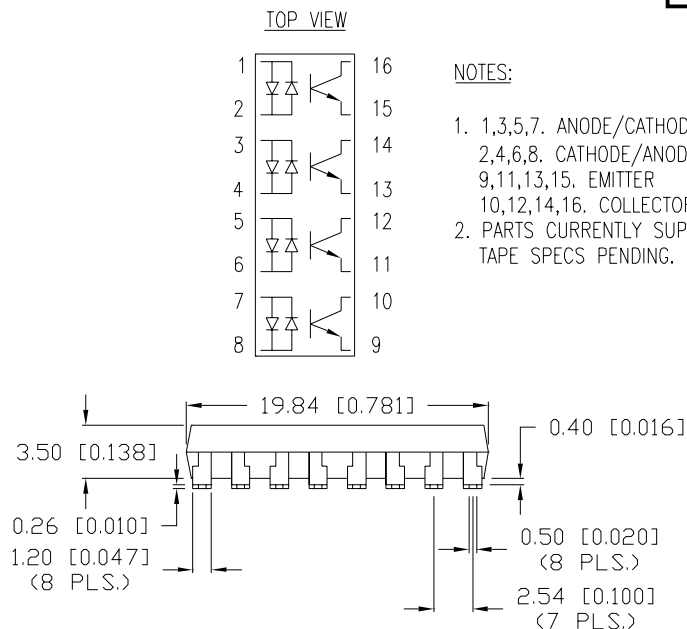


UNCONTROLLED DOCUMENT

PART NUMBER		REV.
OCP-PCT4216/X-TR		
REV.	E.C.N. NUMBER AND REVISION COMMENTS	DATE

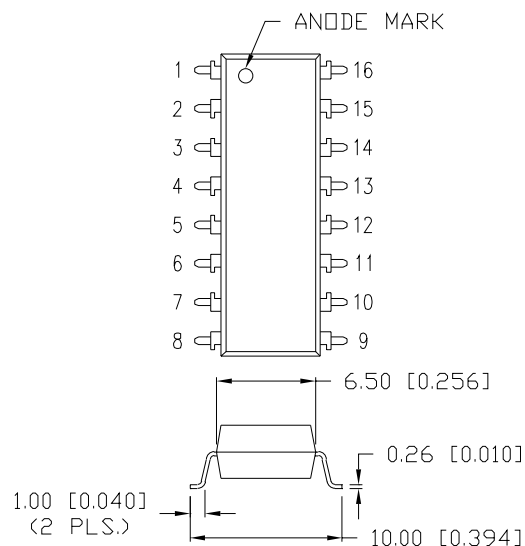

NOTES:

- 1,3,5,7. ANODE/CATHODE
2,4,6,8. CATHODE/ANODE
9,11,13,15. EMITTER
10,12,14,16. COLLECTOR
- PARTS CURRENTLY SUPPLIED IN TUBES.
TAPE SPECS PENDING.

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

PART NUMBER TABLE	
PART= /X	CTR (%)
/A	60 TO 600
/B	60 TO 300

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS $\pm 0.25\text{mm}$ ($\pm 0.010''$)

REV.	PART NUMBER
	OCP-PCT4216/X-TR
SIXTEEN PIN SURFACE MOUNT QUAD CHANNEL PHOTOCOUPLER, BIPOlar INPUT, TRANSITOR OUTPUT, WITHOUT EXTERNAL BASE CONNECTION.	

CONFIDENTIAL INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.
RELIABILITY NOTE OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX INCORPORATED		290 E. HELLEN ROAD PALATINE, ILLINOIS 60067 PHONE: 1-847-359-2790 WEB: HTTP://WWW.LUMEX.COM	
DRAWN BY:	CHECKED BY:	APPROVED BY:	DATE: 8-12-99
TM/BC			PAGE: 1 OF 2 SCALE: N/A

UNCONTROLLED DOCUMENT

PART NUMBER
OCP-PCT4216/X-TR

REV.

REV. E.C.N. NUMBER AND REVISION COMMENTS

DATE

ELECTRO-OPTICAL CHARACTERISTICS (T_a=25°C)

	PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
I	FORWARD VOLTAGE	V _F	I _F =±20mA	-	1.2	1.4	V
	PEAK FORWARD VOLTAGE	V _{FM}	I _{FM} =±0.5A	-	-	3.5	V
	TERMINAL CAPACITANCE	C _t	V=0, f=1kHz	-	30	-	pF
O	COLLECTOR DARK CURRENT	I _{CEO}	V _{CE} =20V, I _F =0	-	-	10 ⁻⁷	A
T	CURRENT TRANSFER RATIO	CRT	I _F =±1mA, V _{CE} =5V	60	-	600	%
	COLLECTOR-EMITTER SATURATION VOLTAGE	V _{CE(sat)}	I _F =±20mA, I _C =1mA	-	0.1	0.3	V
	ISOLATION RESISTANCE	R _{ISO}	DC500V	5x10 ¹⁰	10 ¹¹	-	ohm
	FLOATING CAPACITANCE	C _f	V=0, f=1MHz	-	0.6	1.0	pF
	CUT-OFF FREQUENCY	f _c	V _{CE} =5V, I _C =2mA, R _L =100ohm	-	80	-	kHz
	RESPONSE TIME (RISE)	t _r	V _{CE} =2V, I _C =2mA, R _L =100ohm	-	5	20	μS
	RESPONSE TIME (FALL)	t _f	V _{CE} =2V, I _C =2mA, R _L =100ohm	-	4	20	μS

I=INPUT, O=OUTPUT, T=TRANSFER CHARACTERISTICS.

ABSOLUTE MAXIMUM RATINGS (T_a=25°C)

	PARAMETER	SYMBOL	MAX	UNITS
I	FORWARD CURRENT	I _F	±50	mA
	PEAK FORWARD CURRENT	I _{FM}	±1	A
	POWER DISSIPATION	P _D	70	mW
O	COLLECTOR-EMITTER VOLTAGE	V _{CE0}	60	V
	EMITTER-COLLECTOR VOLTAGE	V _{EC0}	6	V
	COLLECTOR CURRENT	I _C	50	mA
	COLLECTOR POWER DISSIPATION	P _C	150	mW
	TOTAL POWER DISSIPATION	P _{tot}	200	mW
	ISOLATION VOLTAGE 1 MIN.	V _{ISO}	5000	V _{RMS}
	OPERATING TEMP.	T _{opr}	- 30 TO + 100	°C
	STORAGE TEMP.	T _{stg}	- 55 TO + 125	°C
	SOLDERING TEMP.	T _{sol}	+ 260	°C
	2.0mm FROM BODY		10 SEC. MAX	

I=INPUT, O=OUTPUT.

UNCONTROLLED DOCUMENT

*UNLESS OTHERWISE SPECIFIED TOLERANCE IS ±0.25mm (±0.010")

REV.

PART NUMBER
OCP-PCT4216/X-TR

SIXTEEN PIN SURFACE MOUNT QUAD CHANNEL PHOTOCOUPLER,
BIPOLAR INPUT, TRANSISTOR OUTPUT,
WITHOUT EXTERNAL BASE CONNECTION.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE
OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

LUMEX
INCORPORATED

290 E. HELLEN ROAD
PALATINE, ILLINOIS 60067
PHONE: 1-847-359-2790
WEB: HTTP://WWW.LUMEX.COM

DRAWN BY: CHECKED BY: APPROVED BY: DATE: 8-12-99

TM/BC

PAGE: 2 OF 2

SCALE: N/A